

BEGA**67 683.3**

Wall luminaire for indoor use

IP 44

Project · Reference number

Date

Product data sheet

Application

LED wall luminaire · indoor luminaire made of hand-blown opal glass, satin matt and metal housing.

For all lighting tasks in interior applications.

Luminaire with a high protection class.

Product description

Die-cast aluminium and aluminium housing, finish chrome

Hand-blown opal glass, satin matt

Silicone gasket

2 mounting holes \varnothing 5.5 mm

Distance apart 440 x 56 mm

2 cable entries for through-wiring of mains supply cable \varnothing 7-10.5 mm, max. 5 G 1.5[□]

Connection terminal 2.5[□]

Earth conductor connection

Connecting terminal for digital control

LED power supply unit

220-240 V \sim 0/50-60 Hz

DALI controllable

A basic isolation exists between power cable and control line

Safety class I

Protection class IP 44

Protected against granular foreign bodies

> 1 mm and splash water

CE – Conformity mark

Weight: 2.0 kg

Inrush current

Inrush current: 5 A / 50 μ s

Maximum number of luminaires of this type per miniature circuit breaker:

B10A: 31 luminaires

B16A: 50 luminaires

C10A: 52 luminaires

C16A: 85 luminaires

Lamp

Module connected wattage 12.4 W

Luminaire connected wattage 14.6 W

Rated temperature $t_a = 25$ °C

Ambient temperature $t_{a,max} = 50$ °C

67 683.3 K3

Module designation 4x LED-0546/930

Colour temperature 3000 K

Colour rendering index CRI >90

Module luminous flux 1720 lm

Luminaire luminous flux 1325 lm

Luminaire luminous efficiency 90,8 lm/W

67 683.3 K4

Module designation 4x LED-0546/940

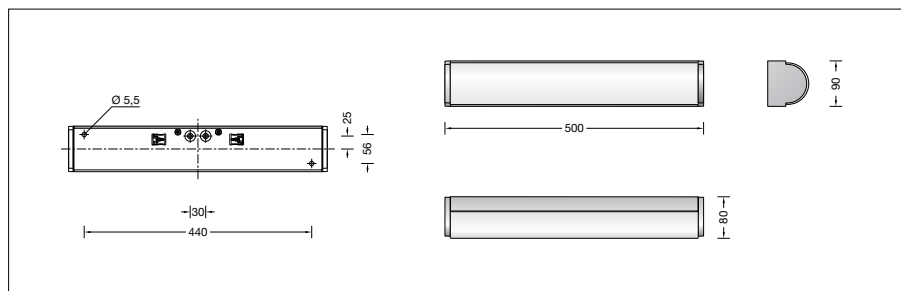
Colour temperature 4000 K

Colour rendering index CRI >90

Module luminous flux 1740 lm

Luminaire luminous flux 1340 lm

Luminaire luminous efficiency 91,8 lm/W

**Service life of the LED**

Ambient temperature $t_a = 25$ °C

– at 190,000h: L70B50

max. ambient temperature $t_a = 50$ °C

– at 165,000h: L70B50

Light technique

Luminaire data for the light planning program DIALux for outdoor lighting, street lighting and indoor lighting as well as luminaire data in EULUMDAT- and IES-format you will find on the BEGA web page www.bega.com.

Article No. 67 683.3

LED colour temperature optionally 3000 K

or 4000 K

3000 K – Article number + **K3**

4000 K – Article number + **K4**

Finish options

- Enamel, white
- Chrome
- Gold

Code number **.1**

Code number **.3**

Code number **.4**