

**BEGA****67 684.3**

Wall luminaire for indoor use

IP 44

Project · Reference number

Date

**Product data sheet****Application**

LED wall luminaire · indoor luminaire made of hand-blown opal glass, satin matt and metal housing.

For all lighting tasks in interior applications.  
Luminaire with a high protection class.

**Product description**

Die-cast aluminium and aluminium housing, finish chrome

Hand-blown opal glass, satin matt

Silicone gasket

2 mounting holes  $\varnothing$  5.5 mm

Distance apart 540 x 56 mm

2 cable entries for through-wiring of mains supply cable  $\varnothing$  7-10.5 mm, max. 5 G 1.5<sup>□</sup>

Connection terminal 2.5<sup>□</sup>

Earth conductor connection

Connecting terminal for digital control

LED power supply unit

220-240 V  $\sim$  0/50-60 Hz

DC 176-280 V

DALI controllable

A basic isolation exists between power cable and control line

Safety class I

Protection class IP 44

Protected against granular foreign bodies

> 1 mm and splash water

CE – Conformity mark

Weight: 2.8 kg

**Inrush current**

Inrush current: 5 A / 50  $\mu$ s

Maximum number of luminaires of this type per miniature circuit breaker:

B 10A: 31 luminaires

B 16A: 50 luminaires

C 10A: 52 luminaires

C 16A: 85 luminaires

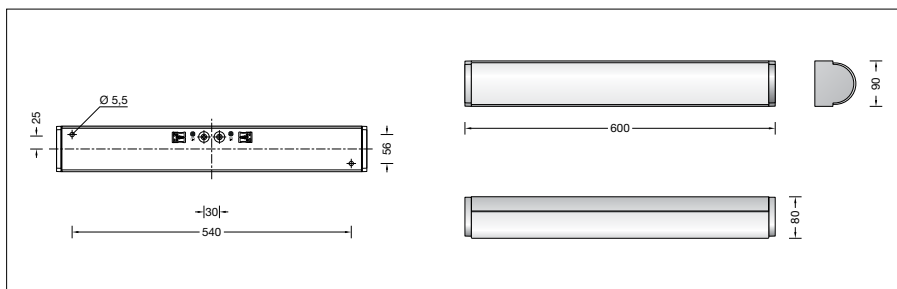
**Lamp**

Module connected wattage 16.6 W

Luminaire connected wattage 19.5 W

Rated temperature  $t_a = 25$  °C

Ambient temperature  $t_{a \max} = 50$  °C

**67 684.3 K3**

Module designation

2x LED-0546/930 2x LED-0551/930

Colour temperature 3000 K

Colour rendering index CRI > 90

Module luminous flux 2300 lm

Luminaire luminous flux 1703 lm

Luminaire luminous efficiency 87,3 lm/W

**67 684.3 K4**

Module designation

2x LED-0546/940 2x LED-0551/940

Colour temperature 4000 K

Colour rendering index CRI > 90

Module luminous flux 2330 lm

Luminaire luminous flux 1725 lm

Luminaire luminous efficiency 88,5 lm/W

**Service life of the LED**

Ambient temperature  $t_a = 25$  °C

– at 195,000h: L70B50

max. ambient temperature  $t_a = 50$  °C

– at 175,000h: L70B50

**Light technique**

Luminaire data for the light planning program DIALux for outdoor lighting, street lighting and indoor lighting as well as luminaire data in EULUMDAT- and IES-format you will find on the BEGA web page [www.bega.com](http://www.bega.com).

**Article No. 67 684.3**

LED colour temperature optionally 3000K

or 4000K

3000 K – Article number + **K3**

4000 K – Article number + **K4**

Finish options

- Enamel, white
- Chrome

Code number **.1**

Code number **.3**