

BEGA**77 380**

Floodlight

IP 55

Project · Reference number

Date

Product data sheet

Application

Portable floodlight with earthspike and mains supply cable with safety plug for temporary installation.

For illuminating walls, facades or advertising boards and for many other lighting applications in garden architecture.

Product description

Floodlight made of aluminium alloy and stainless steel
 Earth spike made of UV-resistant glass - fibre reinforced polyamide synthetic
 Silicone gasket
 Swivel range -20°/+70°
 Factory pre-wired with 5 m connecting cable H05RN-F 3 G 1[□] and power plug
 Lampholder E 27
 Safety class I
 Protection class safety plug IP X4
 Protected against splash water
 Protection class floodlight IP 55
 Dusttight and protected against water jets
 ⌀ 0.5 m ⚡ minimum distance to the illuminated surface
 CE – Conformity mark
 Weight: 1.5 kg

Light technique

Floodlight with rotationally symmetrical light distribution.

Narrow beam when using spot type pressed glass reflector bulb giving punctiform light beam over short distances:


Half beam angle 12°

PAR 38 · 60/80/120 W – Spot –

Wide beam when using flood type pressed glass reflector bulb giving a wide light beam over short distance.

Half beam angle 30°

PAR 38 · 60/80/120 W – Flood –

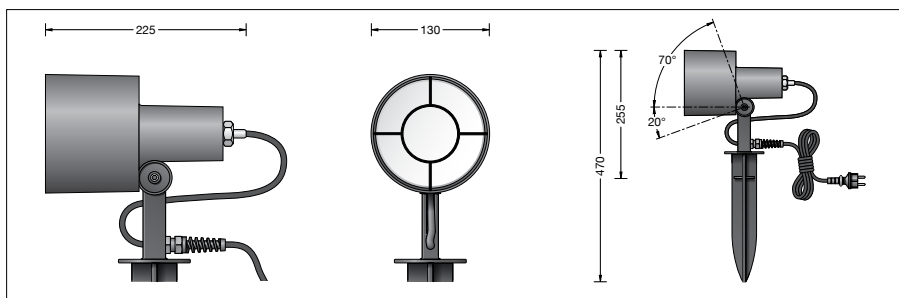

Lamp

Pressed glass reflector bulb

PAR 38 · E 27

Osram: Spot 12° · Flood 30°

PAR 38 60 W · E 27

600 lm

PAR 38 80 W · E 27

800 lm

PAR 38 120 W · E 27

1200 lm

Please note the lamp manufacturers' operating instructions.

Accessories

Permanent connecting pillar for electrical connection of portable garden luminaires and electric gardening tools. They are used for switching tools and lighting equipment.

70375 with 2 socket outlets

70376 with 1 socket outlet + 1 switch

70377 with 4 socket outlets

70378 with 3 socket outlets + 1 switch

For the accessories a separate instructions for use can be provided upon request.