

**BEGA****77 423**

Floodlight

 IP 55

Project · Reference number

Date



## Product data sheet


### Application

Floodlight with mounting box for permanent installation on a wall, under a ceiling or on a pillar. Floodlights for illumination of plants and small woodlands; for walls, advertising boards and other surfaces.

For lighting details and for many other lighting purposes in private or public sectors.

### Product description

Floodlight made of aluminium alloy and stainless steel  
 Silicone gasket  
 Rotation range of floodlight 350°  
 Swivel range -15°/+90°  
 Mounting box with 2 fixing holes  
 ø 6.5 mm · 87 mm spacing  
 2 cable entries for through-wiring of mains supply cable ø 7 - 10,5 mm, max. 3 G 1.5<sup>□</sup>  
 Plug connection  
 Connecting terminal 2.5<sup>□</sup>  
 Earth conductor connection  
 Lampholder E 27  
 Safety class I  
 Protection class IP 55  
 Dust-tight and protected against water jets  
 ⌀ 0.5 m ▨ minimum distance to the illuminated surface  
 – Safety mark  
 – Conformity mark  
 Weight: 1.3 kg

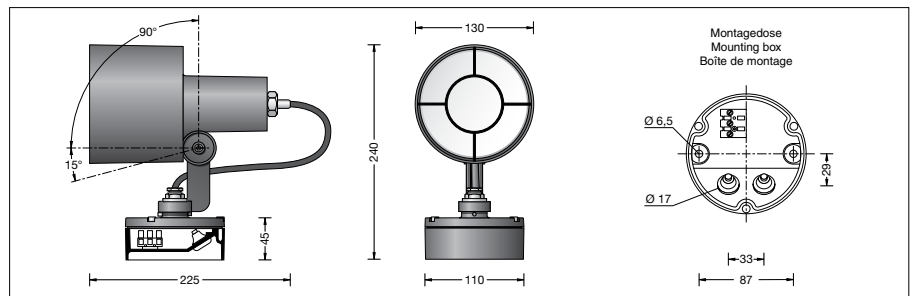

### Lamp

Pressed glass reflector bulb

PAR 38 · E 27

Osram: Spot 12° · Flood 30°

PAR 38 60 W · E 27 600 lm

PAR 38 80 W · E 27 800 lm

PAR 38 120 W · E 27 1200 lm

Please note the lamp manufacturers' operating instructions.

### Light distribution

