

**BEGA****77 941**

Floodlight

☐ IP 65

Project · Reference number

Date

**Product data sheet****Application**

Floodlight with earthspike for temporary installation.

For floodlighting plants, flowers and small woodlands, for wall and other surfaces and for various lighting purposes in the private garden.

**Product description**

Floodlight made of glass-fibre reinforced polyamide

Silicone gasket

No tools are needed to adjust the operating position

Rotation range of floodlight 340°

Swivel range -70°/+70°

Ready for connection with 5 m connecting cable H05RN-F 2 × 1<sup>□</sup> and mains plug.

1 dummy screw gland Pg 7

Lampholder E 27

Safety class II ☐

Protection class · power plug IP X4

Protection against splash water

Protection class · luminaire IP 65

Dust tight luminaires and protected

against water jets

⌀ 0.5 m ▨ minimum distance to the illuminated surface

CE – Conformity mark

Weight: 0.75 kg

**Lamp**

Pressed glass reflector bulb

PAR 38 · 60 W · E 27

470 lm

PAR 38 · 80 W · E 27

670 lm

PAR 38 · 120 W · E 27

1100 lm

Narrow beam – Spot · 12°

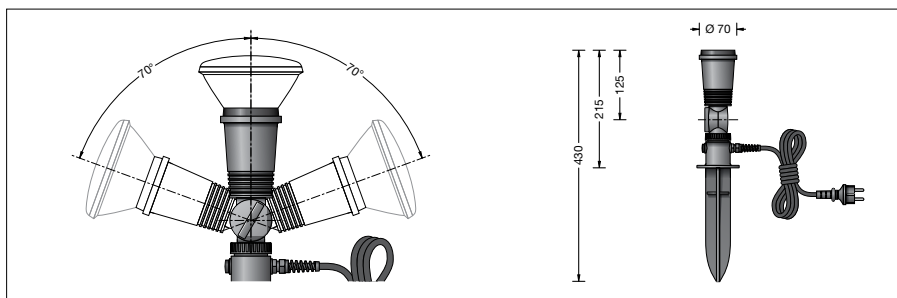
Broad beam – Flood · 30°

Cool beam reflector lamps

PAR 38 must not be used.



Please note the lamp manufacturers' operating instructions.

**Light technique**

Floodlight with rotationally symmetrical light distribution.

Narrow beam when using spot type pressed glass reflector bulb giving punctiform light beam over short distances:

Half beam angle 12°

PAR 38 · 60/80/120 W – Spot –

Wide beam when using flood type pressed glass reflector bulb giving a wide light beam over short distance.

Half beam angle 30°

PAR 38 · 60/80/120 W – Flood –

**Accessories**

Permanent connecting pillar for electrical connection of portable garden luminaires and electric gardening tools. They are used for switching tools and lighting equipment.

**70375** with 2 socket outlets

**70376** with 1 socket outlet + 1 switch

**70377** with 4 socket outlets

**70378** with 3 socket outlets + 1 switch

For the accessories a separate instructions for use can be provided upon request.