






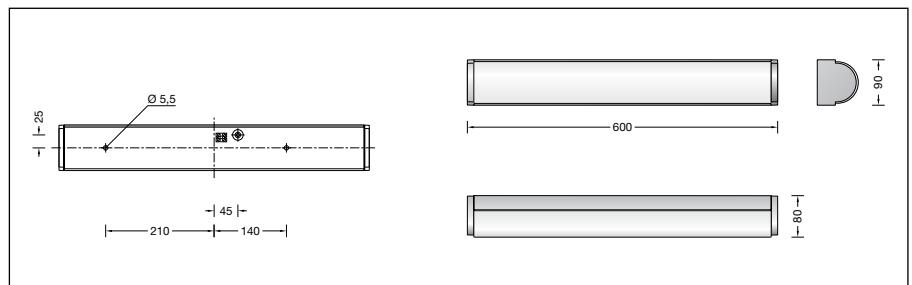
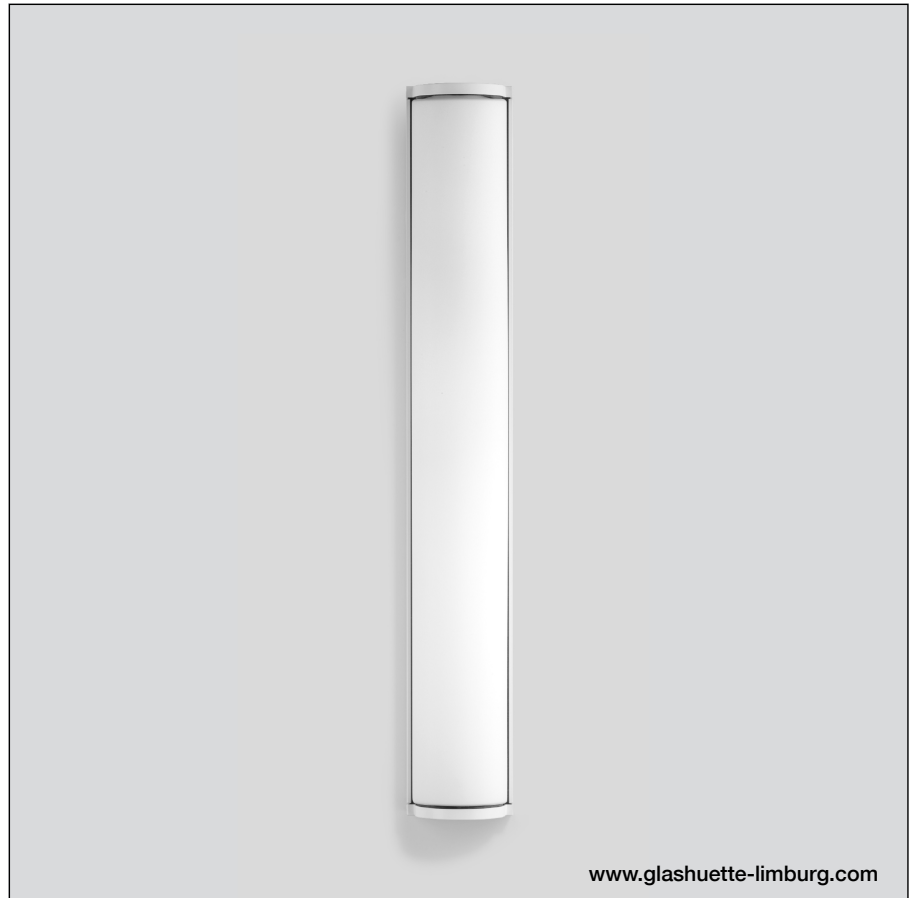
Product data sheet		GLASHÜTTE LIMBURG	
		Wall luminaire	IP 44   78 148.1
Project · Reference number		Date	

Application

Wall luminaire made of hand-blown opal glass, satin matt and metal housing, for all lighting tasks in interior applications. They are ideal for places where a soft and uniform lighting distribution is required. Luminaire with a high protection class.

Product description

Die-cast aluminium and aluminium housing, finish white enamel
 Hand-blown opal glass, satin matt
 2 fixing holes \varnothing 5.5 mm
 350 mm spacing
 1 cable entry for mains supply cable up to \varnothing 10.5 mm max. $3 \times 1.5^{\square}$
 Connecting terminal 2.5^{\square}
 Earth conductor connection
 Lampholder E 14
 Safety class I
 Protection class IP 44
 Protected against granular foreign bodies > 1 mm and splash water
  – Safety mark
 – Conformity mark
 Weight: 2.0 kg

**Lamps**

Luminaire with lampholder E 14
 Lamp wattage max. 4×40 W

4 Halogen-energy-saving lamps
 QC 35 · 28 W/clear · E 14
 Osram: Halogen-Energy Saver
 Order no.: 64542 B ES

345 lm

Article No. 78 148.1

Finish options

- Enamel, white
- Chrome
- Gold

Code number **.1**Code number **.3**Code number **.4**

Please note the lamp manufacturer's operating instructions.