






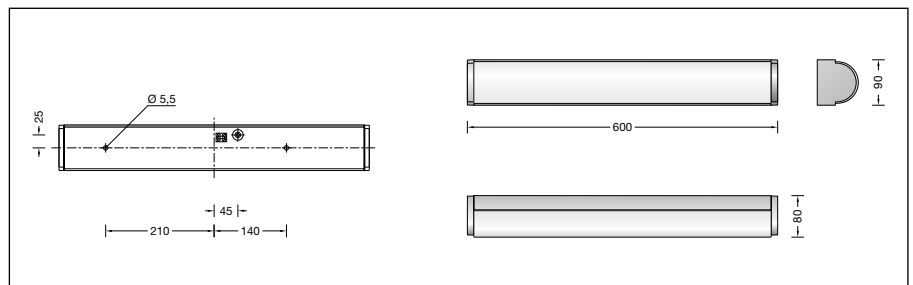
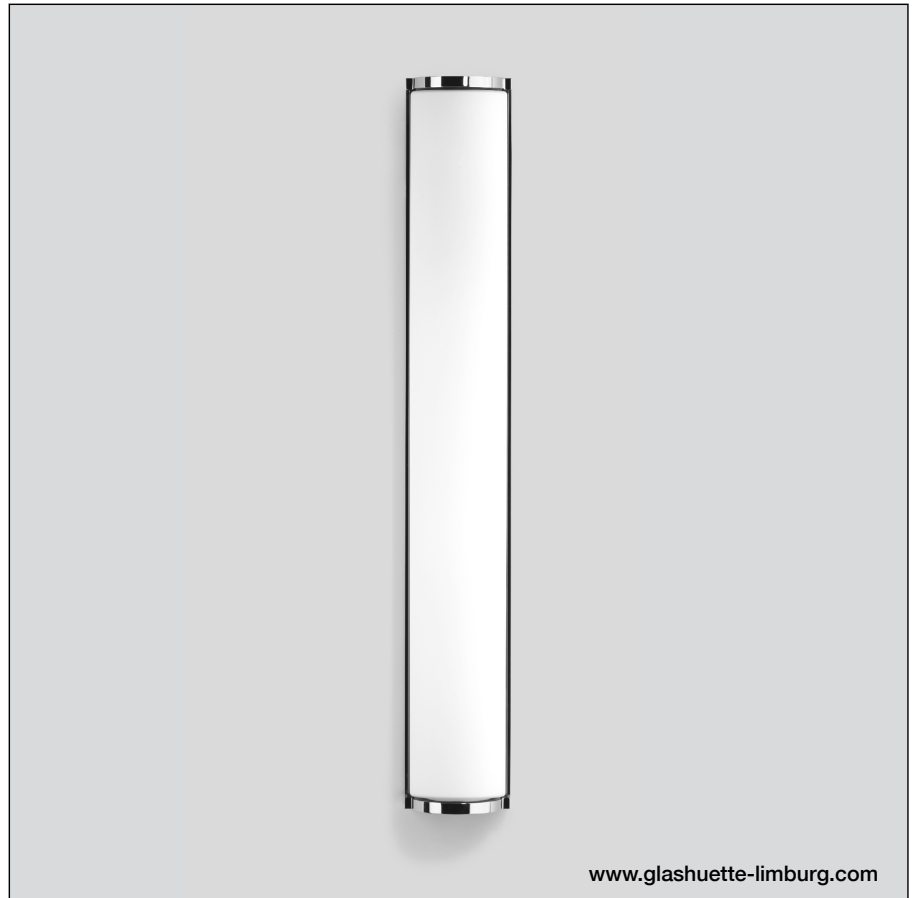
Product data sheet		GLASHÜTTE LIMBURG	
		Wall luminaire	IP 44   78 148.3
Project · Reference number		Date	

**Application**

Wall luminaire made of hand-blown opal glass, satin matt and metal housing, for all lighting tasks in interior applications. They are ideal for places where a soft and uniform lighting distribution is required. Luminaire with a high protection class.

**Product description**

Die-cast aluminium and aluminium housing, finish chrome  
 Hand-blown opal glass, satin matt  
 2 fixing holes  $\varnothing$  5.5 mm  
 350 mm spacing  
 1 cable entry for mains supply cable up to  $\varnothing$  10.5 mm max.  $3 \times 1.5^{\square}$   
 Connecting terminal  $2.5^{\square}$   
 Earth conductor connection  
 Lampholder E 14  
 Safety class I  
 Protection class IP 44  
 Protected against granular foreign bodies > 1 mm and splash water  
  – Safety mark  
 – Conformity mark  
 Weight: 2.0 kg

**Lamps**

Luminaire with lampholder E 14  
 Lamp wattage max.  $4 \times 40$  W

4 Halogen-energy-saving lamps  
 QC 35 · 28 W/clear · E 14  
 Osram: Halogen-Energy Saver  
 Order no.: 64542 B ES

345 lm

**Article No. 78 148.3**

Finish options

- Enamel, white
- Chrome
- Gold

Code number **.1**Code number **.3**Code number **.4**

Please note the lamp manufacturer's operating instructions.