



Project · Reference number

Date

Application

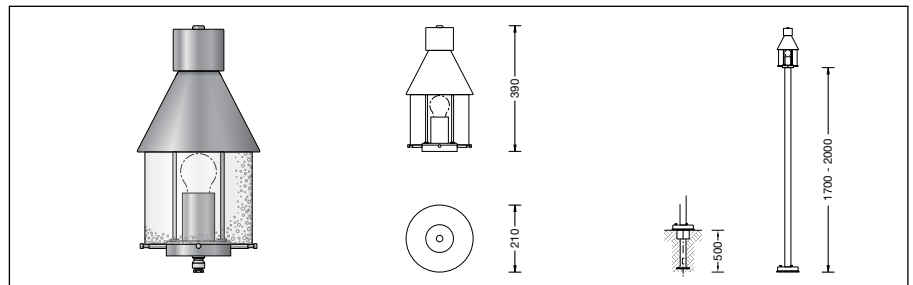
Pole top luminaire with crystal bubble glass.
For lighting paths and parks in private areas.
A luminaire which is distinguished by its high corrosion resistance.
For mounting heights 1700 - 2000 mm.

Product description

Luminaire made of copper and stainless steel
Antique glass
Mounting bush G 1/2 · ISO 228
Connecting cable H05VV-F 3 G 1[□]
Cable length 2 m
Lampholder E 27
Safety class I
Protection class IP 23
Protected against granular foreign bodies
> 12 mm and showers up to 60°
 – Safety mark
 – Conformity mark
Weight: 2.7 kg

Copper

The luminaire parts made of solid copper are delivered with the metal's natural surface colour.
Time and weather factors create the natural patina characteristic for copper.

www.bega.com**Lamp**

Luminaire with lampholder E 27
Lamp wattage max. 100 W

High voltage tungsten halogen lamp QA 55 · E 27

Osram: Halogen Eco Classic A 77 W 1320 lm
Philips: Eco Classic A 70 W 1200 lm

Please note the lamp manufacturers' operating instructions.

Accessories

For this luminaire we recommend to use the following BOOM luminaire poles:

B 552 Pole without door H 1700 mm

B 550 Pole without door H 2000 mm

Cylindrical pole made of raw copper and baseplate made of cast bronze

With mounting plate for bolting onto a foundation or anchorage unit.

Installation bracket with two pole connecting terminal 4[□] plus earth conductor terminal for connection of the cables max. 3 x 2,5[□].

B 573 Anchorage unit

Anchorage unit with mounting flange made of galvanised steel. Total length 500 mm.

3 stainless steel fixing screws M 8.

Pitch circle ø 132 mm.

For the accessories a separate instructions for use can be provided upon request.