

BEGA**84 033**

Pole top luminaire

IP 44

Project · Reference number

Date

Product data sheet

Application

Pole top luminaire with crystal bubble glass.
For lighting paths and parks in private areas.
A luminaire which is distinguished by its high corrosion resistance.
For mounting heights 1700 - 2000 mm.

Product description

Luminaire made of copper,
brass and stainless steel
Antique glass
Mounting bush G ½ · ISO 228
Connecting cable H05VV-F 3G 1[□]
Cable length 2 m
Lampholder E 27
Safety class I
Protection class IP 44
Protected against granular foreign bodies
> 1 mm and splash water
CE – Conformity mark
Horizontal wind catching area: 0.04 m²
Weight: 2.1 kg

Copper

The luminaire parts made of solid copper are delivered with the metal's natural surface colour.
Time and weather factors create the natural patina characteristic for copper.

Light technique

Luminaire data for the light planning program DIALux for outdoor lighting, street lighting and indoor lighting as well as luminaire data in EULUMDAT- and IES-format you will find on the BEGA web page www.bega.com.

Lamp

Luminaire with lampholder E 27
Lamp output max. 75 W

For this luminaire we recommend the following BEGA LED lamps:

13 509 LED 7 W · 805 lm · 2700 K

13 547 LED 7 W · 805 lm · 2700 K
dimnable


13 583 LED 7 W · 805 lm · 3000 K

13 585 LED 7 W · 805 lm · 3000 K
dimnable

13 511 LED 8 W · 1055 lm · 2700 K

13 587 LED 8 W · 1055 lm · 3000 K

Detailed technical and lighting data for the lamps can be found in the data sheets on our website.

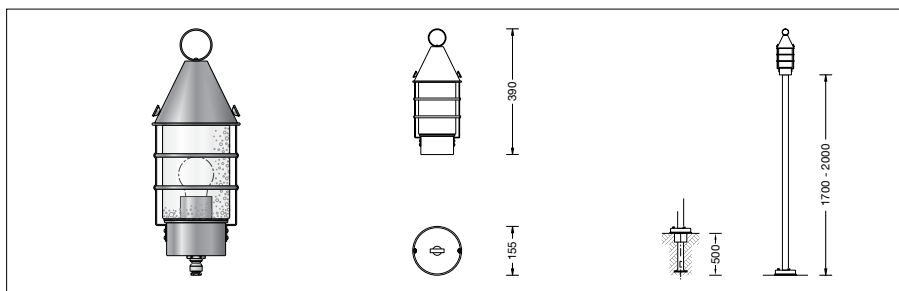

Accessories

For this luminaire we recommend the following BEGA luminaire poles:

Cylindrical poles made of raw copper and baseplate made of cast bronze, without access door

70 552 Pole with baseplate H 1700 mm

70 550 Pole with baseplate H 2000 mm

70 553 Pole with baseplate H 2000 mm

For suitable connection boxes please see the instructions for use of the luminaire poles.

For the accessories a separate instructions for use can be provided upon request.