

Project · Reference number

Date

**Application**

Pole top luminaire with crystal bubble glass.  
For lighting paths and parks in private areas.  
A luminaire which is distinguished by its high  
corrosion resistance.  
For mounting heights 1700 - 2000 mm.

**Product description**

Luminaire made of copper,  
brass and stainless steel

Antique glass

Mounting bush G 1/2 · ISO 228

Connecting cable H05VV-F 3 G 1<sup>□</sup>

Cable length 2 m


Lampholder E 27


Safety class I

Protection class IP 44

Protected against granular foreign bodies

> 1 mm and splash water

 - Safety mark

 - Conformity mark

Weight: 3.3 kg

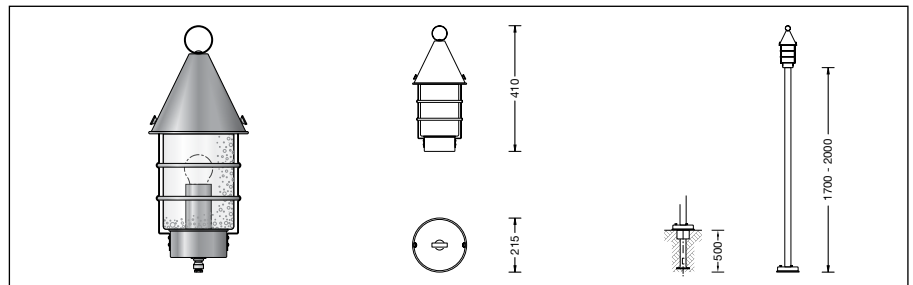
**Copper**

The luminaire parts made of solid copper  
are delivered with the metal's natural surface  
colour.

Time and weather factors create the natural  
patina characteristic for copper.



www.bega.com

**Lamp**

Luminaire with lampholder E 27

Lamp wattage max. 100 W

High voltage tungsten halogen lamp QA 55 ·  
E 27

Osram: Halogen Eco Classic A 77 W 1320 lm  
Philips: Eco Classic A 70 W 1200 lm

Please note the lamp manufacturers' operating  
instructions.

**Accessories**

For this luminaire we recommend to use the  
following BOOM luminaire poles:

**B 552** Pole without door H 1700 mm

**B 550** Pole without door H 2000 mm

Cylindrical pole made of raw copper and  
baseplate made of cast bronze

With mounting plate for bolting onto a  
foundation or anchorage unit.

Installation bracket with two pole connecting  
terminal 4<sup>□</sup> plus earth conductor terminal for  
connection of the cables max. 3 x 2,5<sup>□</sup>.

**B 573** Anchorage unit

Anchorage unit with mounting flange made  
of galvanised steel. Total length 500 mm.

3 stainless steel fixing screws M 8.

Pitch circle ø 132 mm.

For the accessories a separate instructions  
for use can be provided upon request.