

Project · Reference number

Date

## Product data sheet

### Application

Pole top luminaire for the illumination of surfaces and walks for interior and exterior applications. Crystal glass for brilliant light. For mounting height of 2000 mm.

### Product description

Luminaire made of copper, aluminium alloy, aluminium and stainless steel  
Crystal glass  
For pole top  $\varnothing$  60 mm  
Slip fitter insert depth 45 mm  
Connecting terminal and earth conductor terminal 2.5<sup>□</sup>  
Strain-relief clamp  
Lampholder E 27  
Safety class I  
Protection class IP 23  
Protected against granular foreign bodies > 12 mm and showers up to 60°  
**CE** – Conformity mark  
Horizontal wind catching area: 0.074 m<sup>2</sup>  
Weight: 3.4 kg

### Copper

The luminaire parts made of solid copper are delivered with the metal's natural surface colour. Time and weather factors create the natural patina characteristic for copper.

### Lamp

Luminaire with lampholder E 27  
Lamp output max. 100 W

For this luminaire we recommend the following BEGA LED lamps:

**13 509** LED 7 W · 805 lm · 2700 K

**13 547** LED 7 W · 805 lm · 2700 K  
dimmmable

**13 583** LED 7 W · 805 lm · 3000 K

**13 585** LED 7 W · 805 lm · 3000 K  
dimmmable

**13 511** LED 8 W · 1055 lm · 2700 K

**13 562** LED 12 W · 1520 lm · 2700 K



**13 563** LED 12 W · 1520 lm · 2700 K  
dimmmable

**13 587** LED 8 W · 1055 lm · 3000 K

**13 589** LED 12 W · 1520 lm · 3000 K

**13 591** LED 12 W · 1520 lm · 3000 K  
dimmmable

Detailed technical and lighting data for the lamps can be found in the data sheets on our website.

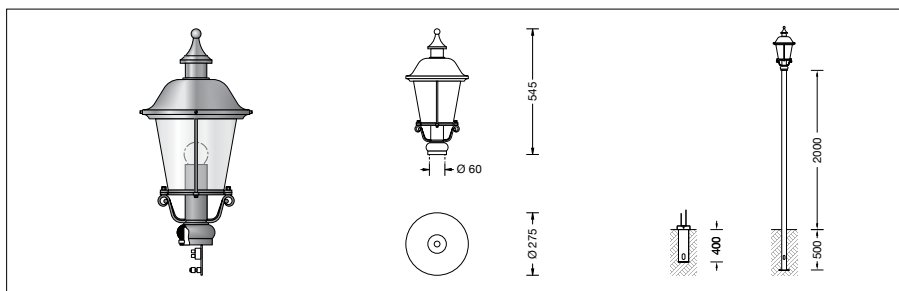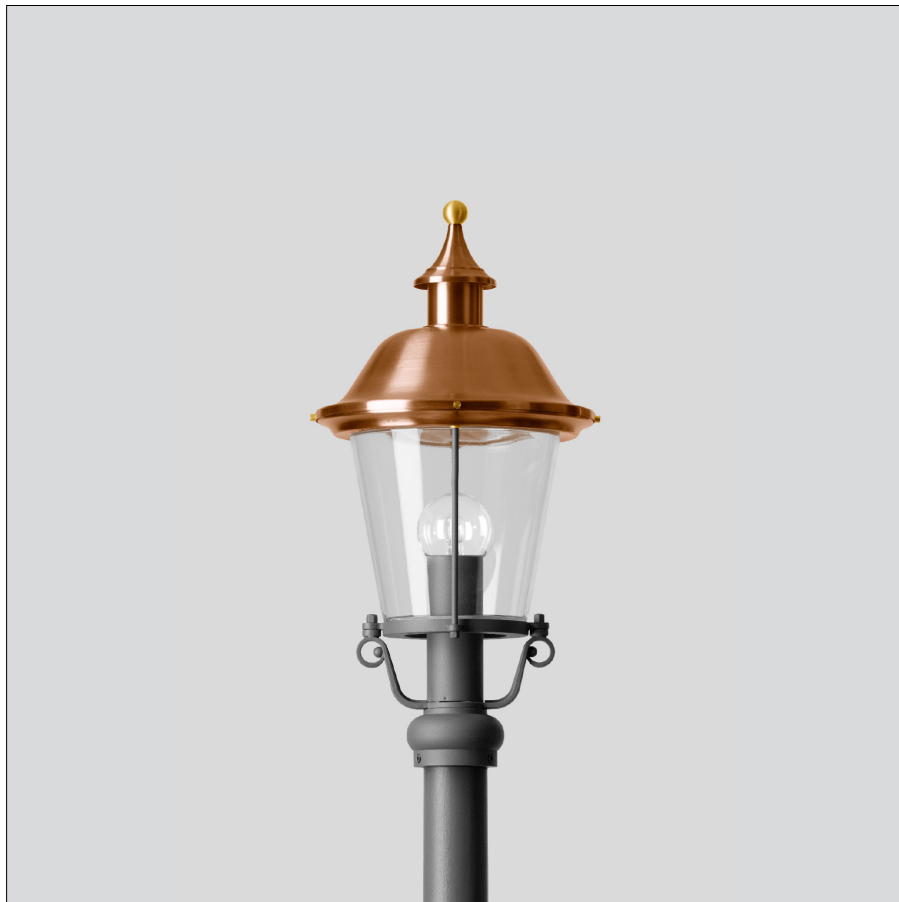

### Accessories

For this luminaire we recommend the following BEGA luminaire poles:

Cylindrical aluminium pole, lacquered without access door

**70 994** Pole with baseplate H 2000 mm

**70 943** Pole with anch.section H 2000 mm

For the accessories a separate instructions for use can be provided upon request.