

BEGA**84 047**

Pole top luminaire

IP 44

Project · Reference number

Date

Product data sheet

Application

Pole top luminaire with crystal bubble glass.
For lighting paths, parks and pedestrian areas.
For pole mounting heights 1600 - 2000 mm.

Product description

Luminaire made of aluminium alloy
and stainless steel
BEGA Unidure® coating technology
Crystal bubble glass
For pole top \varnothing 60 mm
Slip fitter insert depth 45 mm
Connecting terminal and
earth conductor terminal 4[□]
Strain-relief clamp
Lampholder E 27
Safety class I
Protection class IP 44
Protected against granular foreign bodies
> 1 mm and splash water
CE – Conformity mark
Horizontal wind catching area: 0.047 m²
Weight: 3.6 kg


Lamp

Luminaire with lampholder E 27
Lamp output max. 100 W

For this luminaire we recommend the following
BEGA LED lamps:

13 509 LED 7 W · 805 lm · 2700 K**13 547** LED 7 W · 805 lm · 2700 K
dimmable**13 583** LED 7 W · 805 lm · 3000 K**13 585** LED 7 W · 805 lm · 3000 K
dimmable**13 511** LED 8 W · 1055 lm · 2700 K**13 562** LED 12 W · 1520 lm · 2700 K**13 563** LED 12 W · 1520 lm · 2700 K
dimmable**13 587** LED 8 W · 1055 lm · 3000 K**13 589** LED 12 W · 1520 lm · 3000 K**13 591** LED 12 W · 1520 lm · 3000 K
dimmable

Detailed technical and lighting data for the
lamps can be found in the data sheets on our
website.

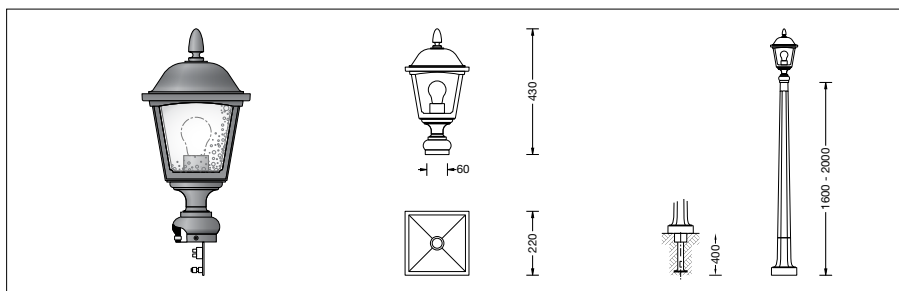

Accessories

For this luminaire we recommend the following
BEGA luminaire poles:

Tapered aluminium poles, lacquered without
access door

70 538 Pole with baseplate H 1600 mm

Tapered aluminium poles,
lacquered with access door and C-clamp

70 539 Pole with baseplate H 2000 mm

For suitable connection boxes please see the
instructions for use of the luminaire poles.

For the accessories a separate instructions
for use can be provided upon request.