

**BEGA****84 050**

Pole top luminaire

IP 44

Project · Reference number

Date

**Product data sheet****Application**

Pole top luminaire with crystal bubble glass.  
For lighting paths and parks in private areas.  
For a mounting height from 1400 - 2000 mm.

**Product description**

Luminaire made of aluminium alloy,  
aluminium and stainless steel  
BEGA Unidure® coating technology  
Crystal bubble glass  
For pole top ø 60 mm  
Slip fitter insert depth 45 mm  
Connecting terminal and  
earth conductor terminal 4<sup>□</sup>  
Strain-relief clamp  
Lampholder E 27  
Safety class I  
Protection class IP 44  
Protected against granular foreign bodies  
> 1 mm and splash water  
CE – Conformity mark  
Horizontal wind catching area: 0.048 m<sup>2</sup>  
Weight: 2.8 kg

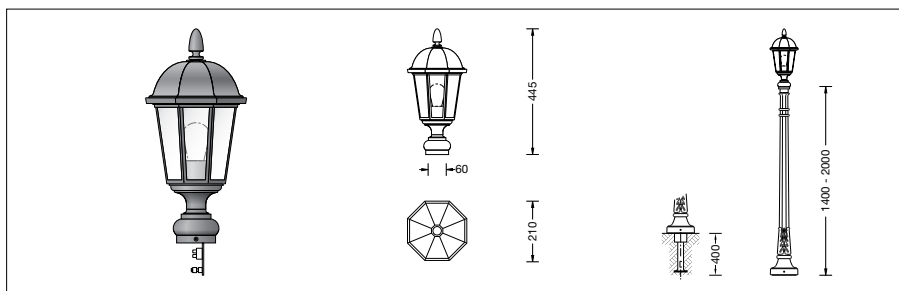
**Lamp**

Luminaire with lampholder E 27  
Lamp output max. 100 W

For this luminaire we recommend the following  
BEGA LED lamps:

**13 509** LED 7 W · 805 lm · 2700 K**13 547** LED 7 W · 805 lm · 2700 K  
dimmmable**13 583** LED 7 W · 805 lm · 3000 K**13 585** LED 7 W · 805 lm · 3000 K  
dimmmable**13 511** LED 8 W · 1055 lm · 2700 K**13 562** LED 12 W · 1520 lm · 2700 K**13 563** LED 12 W · 1520 lm · 2700 K  
dimmmable**13 587** LED 8 W · 1055 lm · 3000 K**13 589** LED 12 W · 1520 lm · 3000 K**13 591** LED 12 W · 1520 lm · 3000 K  
dimmmable

Detailed technical and lighting data for the  
lamps can be found in the data sheets on our  
website.

**Accessories**

For this luminaire we recommend the following  
BEGA luminaire poles:

Tapered aluminium poles, lacquered without  
access door

**70 538** Pole with baseplate H 1600 mm

Tapered aluminium poles,  
lacquered with access door and C-clamp

**70 539** Pole with baseplate H 2000 mm**70 549** Pole with baseplate H 2000 mm

For suitable connection boxes please see the  
instructions for use of the luminaire poles.

For the accessories a separate instructions  
for use can be provided upon request.