

**BEGA****84 080**

Bollard

IP 55

Project · Reference number

Date

## Product data sheet

### Application

Bollard with narrow beam, rotationally symmetrical light output for lighting of paths, flower-beds and terraces.

The fitted cylindrical lens made of crystal glass concentrates the light horizontally.

### Product description

Luminaire made of aluminium alloy, aluminium and stainless steel  
 BEGA Unidure® coating technology  
 Optical cylindrical lens made of crystal glass  
 Luminaire with mounting plate for bolting onto a foundation or an anchorage unit  
 Luminaire can be aligned on the mounting plate around 360°  
 Mounting bracket with connection box and 3-pole terminal 4<sup>2</sup> for connection of mains supply cable max. 3 × 2.5<sup>2</sup>  
 Lampholder E 27  
 Safety class I  
 Protection class IP 55  
 Dust-tight and protected against water jets  
 Impact strength IK06  
 Protection against mechanical impacts < 1 joule  
 CE – Conformity mark  
 Weight: 6.6 kg

### Lamp

Luminaire with lampholder E 27  
 Lamp output max. 100 W

For this luminaire we recommend the following BEGA LED lamps:

**13509** LED 7 W · 805 lm · 2700 K

**13547** LED 7 W · 805 lm · 2700 K  
 dimmable

**13583** LED 7 W · 805 lm · 3000 K

**13585** LED 7 W · 805 lm · 3000 K  
 dimmable

**13511** LED 8 W · 1055 lm · 2700 K

**13562** LED 12 W · 1520 lm · 2700 K


**13563** LED 12 W · 1520 lm · 2700 K  
 dimmable

**13587** LED 8 W · 1055 lm · 3000 K

**13589** LED 12 W · 1520 lm · 3000 K

**13591** LED 12 W · 1520 lm · 3000 K  
 dimmable

Detailed technical and lighting data for the lamps can be found in the data sheets on our website.

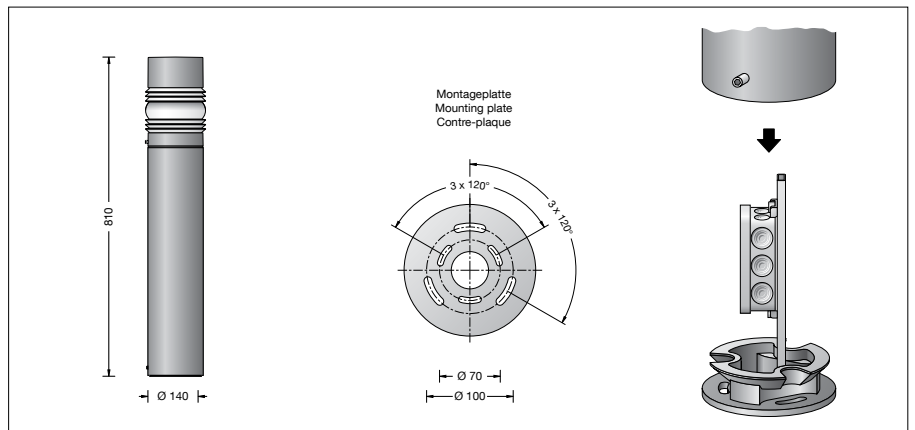

### Light technique

Luminaire data for the light planning program DIALux for outdoor lighting, street lighting and indoor lighting as well as luminaire data in EULUMDAT- and IES-format you will find on the BEGA web page [www.bega.com](http://www.bega.com).

### Accessories

**70894** Anchorage unit  
 Anchorage unit with mounting flange made of galvanised steel. Total length 400 mm.  
 3 stainless steel fixing screws M 6.  
 Pitch circle  $\varnothing$  70 mm.

See the separate instructions for use.