

BEGA**84 313**

Garden and pathway luminaire

IP 65

Project · Reference number

Date

Product data sheet**Application**

Unshielded LED garden and path luminaire with rotationally symmetrical light distribution for effective illumination in private gardens.

Product description

Luminaire made of cast aluminium, aluminium and stainless steel
 BEGA Unidure® coating technology
 Opal glass with screw neck
 Silicone gasket
 Luminaire with anchorage unit for fixing in the soil
 The anchorage unit is made of galvanised steel according to EN ISO 1461
 Mounting bracket with connection box and 3-pole terminal 4² for connection of mains supply cable max. 3 × 2.5²
 Lampholder E 27
 Safety class I
 Protection class IP 65
 Dust-tight and protection against water jets
 Impact strength IK04
 Protection against mechanical impacts < 0.5 joule
 CE – Conformity mark
 Weight: 7.4 kg

Lamp

Luminaire with lampholder E 27
 Lamp output max. 100 W

For this luminaire we recommend the following BEGA LED lamps:

13 510 LED 7 W · 805 lm · 2700 K

13 548 LED 7 W · 805 lm · 2700 K
dimnable

13 584 LED 7 W · 805 lm · 3000 K

13 586 LED 7 W · 805 lm · 3000 K
dimnable

13 512 LED 8 W · 1055 lm · 2700 K

13 564 LED 12 W · 1400 lm · 2700 K

13 565 LED 12 W · 1400 lm · 2700 K
dimnable

13 588 LED 8 W · 1055 lm · 3000 K

13 590 LED 12 W · 1400 lm · 3000 K

13 592 LED 12 W · 1400 lm · 3000 K
dimnable

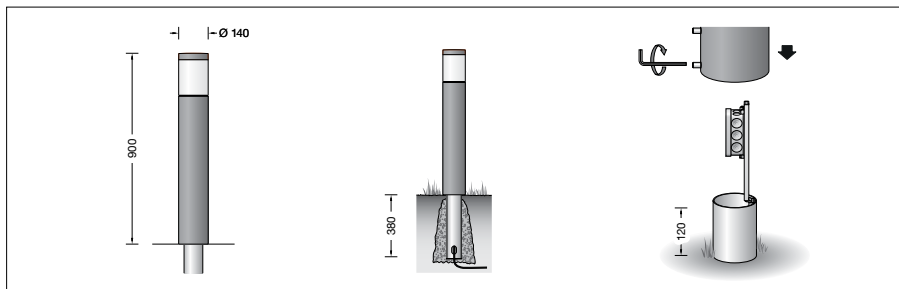
Radio-controlled version (Zigbee 3.0):

13 555 LED 9 W · 805 lm · 2700 K
dimnable

13 556 LED 9 W · 805 lm · 2700-6500 K
dimnable · tunable white

13 557 LED 9.5 W · 805 lm · 2700-6500 K
dimnable · tunable white · RGBW

Detailed technical and lighting data for the lamps can be found in the data sheets on our website.

**Article No. 84 313**

Colour graphite or silver
 graphite – article number
 silver – article number + **A**

Light distribution