

BEGA**84 317**

Garden and pathway luminaire

IP 65

Project · Reference number

Date

Product data sheet**Application**

Unshielded LED garden and path luminaire with safety guard. Light exit 180°. With hand-blown, three-ply opal glass and pleasantly uniform light effect for effective illumination in private gardens.

Product description

Luminaire made of cast aluminium, aluminium and stainless steel
 BEGA Unidure® coating technology
 Opal glass with screw neck
 Silicone gasket
 Luminaire with anchorage unit for fixing in the soil
 The anchorage unit is made of galvanised steel according to EN ISO 1461
 Mounting bracket with connection box for through-wiring of up to 5 × 2,5²
 LED power supply unit
 220-240 V ~ 0/50-60 Hz
 DC 176-276 V
 DALI controllable
 A basic isolation exists between power cable and control line
 BEGA Thermal Control®
 Temporary thermal regulation to protect temperature-sensitive components without switching off the luminaire
 Safety class I
 Protection class IP 65
 Dust-tight and protection against water jets
 Impact strength IK09
 Protection against mechanical impacts < 10 joule
 CE – Conformity mark
 Weight: 8.4 kg

Lamp

Module connected wattage	8.2 W
Luminaire connected wattage	10 W
Rated temperature	$t_a = 25\text{ °C}$
Ambient temperature	$t_{a\text{ max}} = 45\text{ °C}$

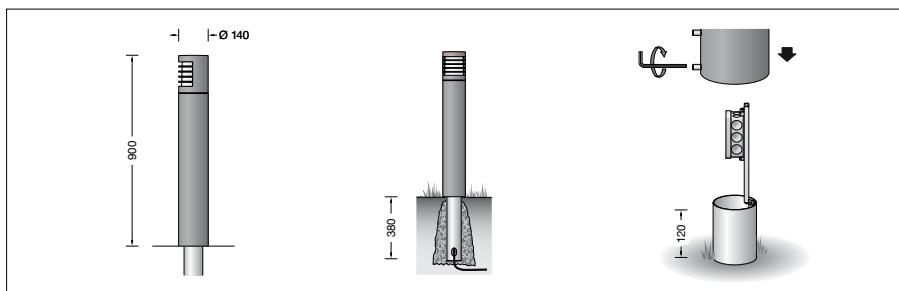

On request we can offer you modifications for environments with higher temperatures as a customized product.

84 317 K3

Module designation	LED-0292/830
Colour temperature	3000 K
Colour rendering index	CRI > 80
Module luminous flux	1125 lm
Luminaire luminous flux	180 lm
Luminaire luminous efficiency	18 lm/W

84 317 K4

Module designation	LED-0292/840
Colour temperature	4000 K
Colour rendering index	CRI > 80
Module luminous flux	1125 lm
Luminaire luminous flux	180 lm
Luminaire luminous efficiency	18 lm/W

Light distribution**Service life · Ambient temperature**

Rated temperature $t_a = 25\text{ °C}$	
LED psu:	> 50,000h
LED module:	> 200,000h (L 80 B 50)
	100,000h (L 90 B 50)

Ambient temperature $t_{a\text{ max}} = 45\text{ °C}$ (100 %)	
LED psu:	50,000h
LED module:	97,000h (L 80 B 50)
	100,000h (L 70 B 50)

Light technique

Luminaire data for the light planning program DIALux for outdoor lighting, street lighting and indoor lighting as well as luminaire data in EULUMDAT- and IES-format you will find on the BEGA web page www.bega.com. Recommended light point interval 6 m.

Inrush current

Inrush current: 4 A / 30 μ s
 Maximum number of luminaires of this type per miniature circuit breaker:
 B 10 A: 50 luminaires
 B 16 A: 50 luminaires
 C 10 A: 50 luminaires
 C 16 A: 50 luminaires

Article No. 84 317

LED colour temperature optionally 3000 K or 4000 K
 3000 K – Article number + **K3**
 4000 K – Article number + **K4**

Colour graphite or silver
 graphite – article number
 silver – article number + **A**