

BEGA**84 318**

Garden and pathway luminaire

IP 65

Project · Reference number

Date

Product data sheet

Application

Unshielded LED garden and path luminaire with safety guard. Light exit 180°.

With hand-blown, three-ply opal glass and pleasantly uniform light effect for effective illumination in private gardens.

Product description

Luminaire made of cast aluminium, aluminium and stainless steel

BEGA Unidure® coating technology

Opal glass with screw neck

Silicone gasket

Luminaire with anchorage unit for fixing in the soil

The anchorage unit is made of galvanised steel according to EN ISO 1461

Mounting bracket with connection box and

3-pole terminal 4[□] for connection of mains supply cable max. 3 × 2.5[□]

Lampholder E 14

Safety class I

Protection class IP 65

Dust-tight and protection against water jets

Impact strength IK07

Protection against mechanical

impacts < 2 joule

CE – Conformity mark

Weight: 5.1 kg

Lamp

Luminaire with lampholder E 14

Lamp output max. 25 W

For this luminaire we recommend the following BEGA LED lamps:

13 552 LED 4 W · 470 lm · 2700 K

13 554 LED 5 W · 470 lm · 2700 K
dimnable

13 594 LED 4 W · 470 lm · 3000 K


13 596 LED 5 W · 470 lm · 3000 K
dimnable

Radio-controlled version (Zigbee 3.0):

13 558 LED 2,3 W · 470 lm · 2700 K
dimnable

13 559 LED 5,8 W · 470 lm · 2700-6500 K
dimnable · tunable white

Detailed technical and lighting data for the lamps can be found in the data sheets on our website.

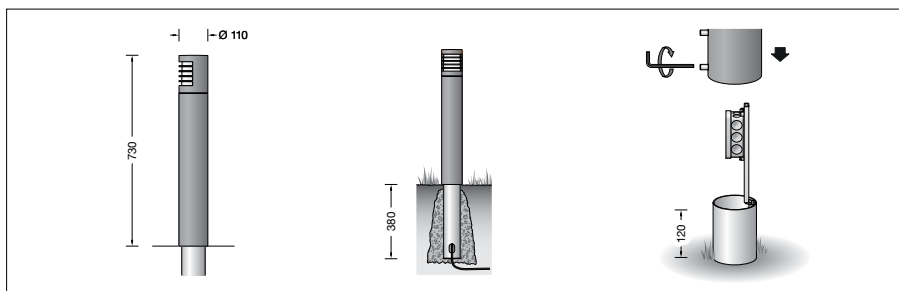

Article No. 84 318

Colour graphite or silver
graphite – article number
silver – article number + **A**

Light distribution

