

**BEGA****84 319**

Garden and pathway luminaire

IP 65

Project · Reference number

Date

**Product data sheet****Application**

Unshielded LED garden and path luminaire with safety guard. Light exit 180°. With hand-blown, three-ply opal glass and pleasantly uniform light effect for effective illumination in private gardens.

**Product description**

Luminaire made of cast aluminium, aluminium and stainless steel  
 BEGA Unidure® coating technology  
 Opal glass with screw neck  
 Silicone gasket  
 Luminaire with anchorage unit for fixing in the soil  
 The anchorage unit is made of galvanised steel according to EN ISO 1461  
 Mounting bracket with connection box and 3-pole terminal 4<sup>□</sup> for connection of mains supply cable max. 3 × 2.5<sup>□</sup>  
 Lampholder E 27  
 Safety class I  
 Protection class IP 65  
 Dust-tight and protection against water jets  
 Impact strength IK09  
 Protection against mechanical impacts < 10 joule  
**CE** – Conformity mark  
 Weight: 8.4 kg

**Lamp**

Luminaire with lampholder E 27  
 Lamp output max. 60 W

For this luminaire we recommend the following BEGA LED lamps:

**13510** LED 7 W · 805 lm · 2700 K

**13548** LED 7 W · 805 lm · 2700 K  
 dimmable

**13584** LED 7 W · 805 lm · 3000 K

**13586** LED 7 W · 805 lm · 3000 K  
 dimmable

**13512** LED 8 W · 1055 lm · 2700 K

**13588** LED 8 W · 1055 lm · 3000 K

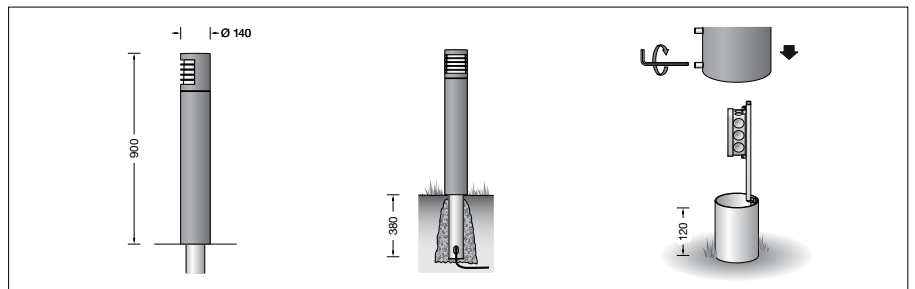
Radio-controlled version (Zigbee 3.0):

**13555** LED 9 W · 805 lm · 2700 K  
 dimmable

**13556** LED 9 W · 805 lm · 2700-6500 K  
 dimmable · tunable white

**13557** LED 9.5 W · 805 lm · 2700-6500 K  
 dimmable · tunable white · RGBW

Detailed technical and lighting data for the lamps can be found in the data sheets on our website.

**Article No. 84 319**

Colour graphite or silver  
 graphite – article number  
 silver – article number + **A**

**Light distribution**