

BEGA**84 416**

Pole top luminaire

IP 65

Project · Reference number

Date

Product data sheet

Application

Pole top luminaire with unshielded light distribution.

Soft diffused light through white impact resistant synthetic diffuser.

For lighting paths, parks and pedestrian precincts in private or public sectors.

For mounting heights 2000 mm.

Product description

Luminaire made of cast aluminium, aluminium and stainless steel

BEGA Unidure® coating technology

White synthetic sphere

For pole top \varnothing 60 mm

Slip fitter insert depth 45 mm

Connecting cable H05VV-F 3G 1[□]

Cable length 2 m

Lampholder E 27

Safety class I

Protection class IP 65

Dust-tight and protection against water jets

CE – Conformity mark

Horizontal wind catching area: 0.1 m²

Weight: 2.5 kg

Lamp

Luminaire with lampholder E 27

Lamp output max. 100 W

For this luminaire we recommend the following BEGA LED lamps:

13 512 LED 8 W · 1055 lm · 2700 K

13 564 LED 12 W · 1400 lm · 2700 K

13 565 LED 12 W · 1400 lm · 2700 K
dimnable

13 588 LED 8 W · 1055 lm · 3000 K

13 590 LED 12 W · 1400 lm · 3000 K

13 592 LED 12 W · 1400 lm · 3000 K
dimnable

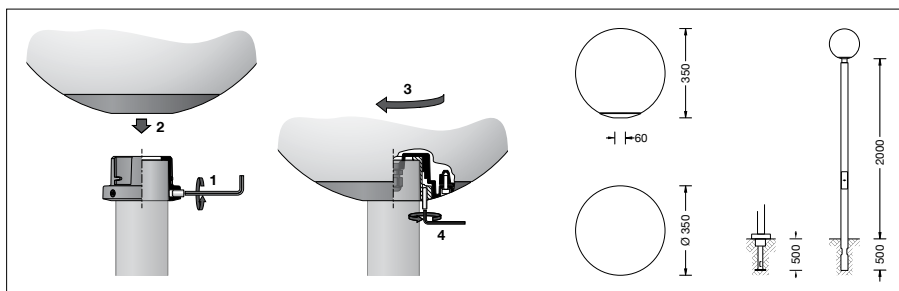
Radio-controlled version (Zigbee 3.0):

13 555 LED 9 W · 805 lm · 2700 K
dimnable

13 556 LED 9 W · 805 lm · 2700-6500 K
dimnable · tunable white

13 557 LED 9.5 W · 805 lm · 2700-6500 K
dimnable · tunable white · RGBW

Detailed technical and lighting data for the lamps can be found in the data sheets on our website.

**Accessories**

For this luminaire we recommend the following BEGA luminaire poles:

Cylindrical aluminium poles · lacquered
with access door and C-clamp

70 740 Pole with anch.section H 2000 mm

70 907 Pole with baseplate H 2000 mm

For suitable connection boxes please see the instructions for use of the luminaire poles.