BEGA 84 420

Garden and pathway luminaire IP 65

Project · Reference number

Date

Product data sheet

Application

Unshielded LED garden and path luminaire with rotationally symmetrical light distribution for effective illumination in private gardens.

Product description

Luminaire made of cast aluminium, aluminium and stainless steel BEGA Unidure® coating technology Opal glass with screw neck Silicone gasket

Luminaire with mounting base made of hot-dip galvanised steel according to EN ISO 1461 for bolting onto a foundation provided by the customer or on other paved surfaces such as terraces and paving stones Base plate with 3 fixing holes ø 9 mm \cdot Pitch 120° \cdot Pitch circle ø 65 mm Mounting bracket with connection box and 3-pole terminal $4^{\rm D}$ for connection of mains supply cable max. $3\times2.5^{\rm D}$ Lampholder E 27 Safety class I

Lampholder E 27
Safety class I
Protection class IP 65
Dust-tight and protection against water jets
Impact strength IK04
Protection against mechanical
Impacts < 0.5 joule

C € – Conformity mark Weight: 5.8 kg

Lamp

Luminaire with lampholder E 27 Lamp output max. 100 W

For this luminaire we recommend the following BEGA LED lamps:

13510 LED 7 W · 805 lm · 2700 K **13548** LED 7 W · 805 lm · 2700 K dimmable

13 584 LED 7 W · 805 lm · 3000 K **13 586** LED 7 W · 805 lm · 3000 K dimmable

13512 LED 8 W · 1055 lm · 2700 K **13564** LED 12 W · 1400 lm · 2700 K **13565** LED 12 W · 1400 lm · 2700 K

dimmable

13588 LED 8 W · 1055 Im · 3000 K **13590** LED 12 W · 1400 Im · 3000 K **13592** LED 12 W · 1400 Im · 3000 K dimmable

Radio-controlled version (Zigbee 3.0):


13 555 LED 9 W · 805 lm · 2700 K dimmable

13 556 LED 9 W · 805 lm · 2700 - 6500 K dimmable · tunable white

13557 LED 9.5 W · 805 lm · 2700 - 6500 K dimmable · tunable white · RGBW

Detailed technical and lighting data for the lamps can be found in the data sheets on our website.



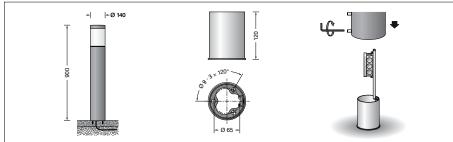

Article No. 84 420Colour graphite or silver graphite – article number silver – article number + **A**

Light distribution

