

BEGA**84 425**

Garden and pathway luminaire

IP 65

Project · Reference number

Date

Product data sheet**Application**

Unshielded LED garden and path luminaire with safety guard. Light exit 180°.

With hand-blown, three-ply opal glass and pleasantly uniform light effect for effective illumination in private gardens.

Product description

Luminaire made of cast aluminium, aluminium and stainless steel

BEGA Unidure® coating technology

Opal glass with screw neck

Silicone gasket

Luminaire with mounting base made of hot-dip galvanised steel according to EN ISO 1461 for bolting onto a foundation provided by the customer or on other paved surfaces such as terraces and paving stones

Base plate with 3 fixing holes

ø 9 mm · Pitch 120° · Pitch circle ø 65 mm

Mounting bracket with connection box and

3-pole terminal 4[□] for connection of mains supply cable max. 3 × 2.5[□]

Lampholder E 14

Safety class I

Protection class IP 65

Dust-tight and protection against water jets

Impact strength IK07

Protection against mechanical

impacts < 2 joule

CE – Conformity mark

Weight: 3.6 kg

Lamp

Luminaire with lampholder E 14

Lamp output max. 25 W

For this luminaire we recommend the following BEGA LED lamps:

13 552 LED 4 W · 470 lm · 2700 K

13 554 LED 5 W · 470 lm · 2700 K
dimmmable

13 594 LED 4 W · 470 lm · 3000 K

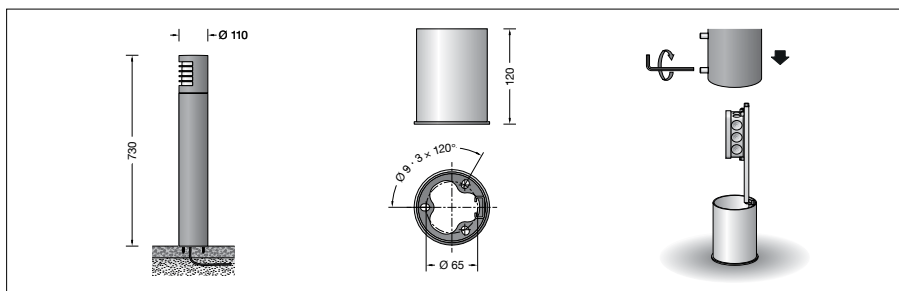
13 596 LED 5 W · 470 lm · 3000 K
dimmmable

Radio-controlled version (Zigbee 3.0):

13 558 LED 2,3 W · 470 lm · 2700 K
dimmmable

13 559 LED 5,8 W · 470 lm · 2700-6500 K
dimmmable · tunable white

Detailed technical and lighting data for the lamps can be found in the data sheets on our website.

**Article No. 84 425**

Colour graphite or silver
graphite – article number
silver – article number + **A**

Light distribution