

BEGA**84 426**

Garden and pathway luminaire

IP 65

Project · Reference number

Date

Product data sheet

Application

Unshielded LED garden and path luminaire with safety guard. Light exit 180°. With hand-blown, three-ply opal glass and pleasantly uniform light effect for effective illumination in private gardens.

Product description

Luminaire made of cast aluminium, aluminium and stainless steel
 BEGA Unidure® coating technology
 Opal glass with screw neck
 Silicone gasket
 Luminaire with mounting base made of hot-dip galvanised steel according to EN ISO 1461 for bolting onto a foundation provided by the customer or on other paved surfaces such as terraces and paving stones
 Base plate with 3 fixing holes
 \varnothing 9 mm · Pitch 120° · Pitch circle \varnothing 65 mm
 Mounting bracket with connection box and 3-pole terminal 4² for connection of mains supply cable max. 3 × 2.5²
 Lampholder E 27
 Safety class I
 Protection class IP 65
 Dust-tight and protection against water jets
 Impact strength IK09
 Protection against mechanical impacts < 10 joule
 CE – Conformity mark
 Weight: 6.7 kg

Lamp

Luminaire with lampholder E 27
 Lamp output max. 60 W


For this luminaire we recommend the following BEGA LED lamps:

- 13510** LED 7 W · 805 lm · 2700 K
13548 LED 7 W · 805 lm · 2700 K dimmable
- 13584** LED 7 W · 805 lm · 3000 K
13586 LED 7 W · 805 lm · 3000 K dimmable
- 13512** LED 8 W · 1055 lm · 2700 K
13588 LED 8 W · 1055 lm · 3000 K

Radio-controlled version (Zigbee 3.0):

- 13555** LED 9 W · 805 lm · 2700 K dimmable
13556 LED 9 W · 805 lm · 2700-6500 K dimmable · tunable white
13557 LED 9.5 W · 805 lm · 2700-6500 K dimmable · tunable white · RGBW

Detailed technical and lighting data for the lamps can be found in the data sheets on our website.

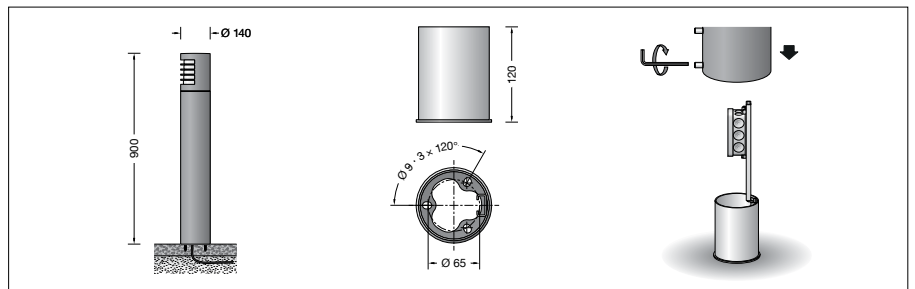

Article No. 84 426

Colour graphite or silver
 graphite – article number
 silver – article number + **A**

Light distribution

