


BEGA**84 513**

High-performance floodlight RGBW



Project · Reference number

Date

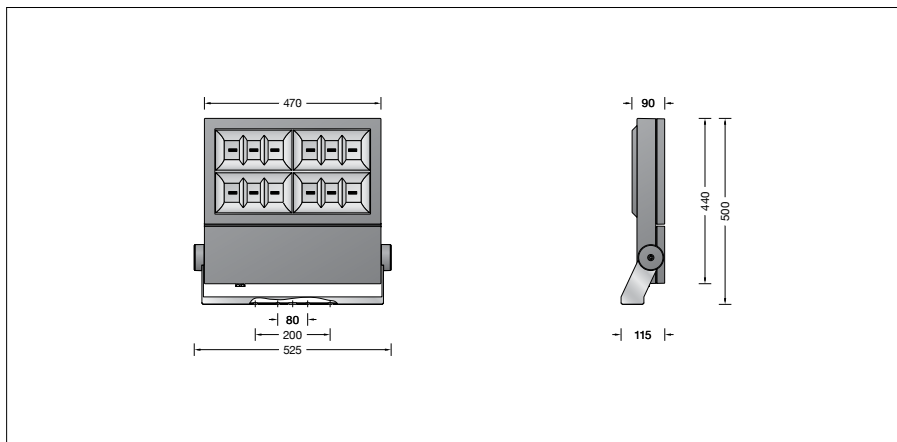

Product data sheet

Product description

Floodlight made of aluminium alloy, aluminium and stainless steel
 Safety glass with optical structure
 Silicone gasket
 Reflector made of pure anodised aluminium
 Swivel range 180°
 Mounting bracket made of stainless steel
 Steel grade no. 1.4301 with
 1 central drilling \varnothing 22 mm and
 2 fixing holes \varnothing 9 mm · 80 mm spacing
 2 fixing holes \varnothing 11.5 mm · 200 mm spacing
 2 screw cable glands with strain relief
 for through-wiring of the mains supply cable
 from \varnothing 7,5-15 mm
 1 screw cable gland closed at the factory with
 a dummy plug
 Connecting terminal and
 earth conductor terminal 2.5[□]
 Integrated changeover switch for the manually
 limitation of the luminous flux or power
 reduction via connected control cable with
 three adjustable outputs of 70 % · 50 % · 30 %
 LED power supply unit
 220-240 V \sim 0/50-60 Hz
 DC 176-264 V
 During DC operation the LED power
 is reduced to 50 %
 DALI controllable
 A basic isolation exists between power cable
 and control line
 Safety class I
 Protection class IP 67
 Dust-tight and protection against temporary
 immersion
 Impact strength IK08
 Protection against mechanical
 impacts < 5 joule
 – Safety mark
 – Conformity mark
 Wind catching area: 0.21 m²
 Weight: 17.0 kg

Application

LED high-performance floodlight
 with wide beam light distribution for additive
 colour mixing RGBW.
 The floodlight can be controlled by DALI colour
 light control (DT8, RGBWAF, xy).
 We recommend our BEGA Control system for
 this purpose.
 For a variety of interior and exterior lighting
 applications.

Lamp

Module connected wattage	169.2 W
Luminaire connected wattage	192.3 W
Rated temperature	$t_a = 25\text{ °C}$
Ambient temperature	$t_{a,max} = 40\text{ °C}$

Module designation	4x LED-0807/RGBW
Luminaire luminous flux	11594 lm
Luminaire luminous efficiency	60,3 lm/W

Service life of the LED

Ambient temperature $t_a = 25\text{ °C}$
 – at 280,000 h: L70B50

max. ambient temperature $t_a = 40\text{ °C}$
 – at 210,000 h: L70B50

Light technique

Broad spread light distribution.
 Half beam angle 73/65°
 Luminaire data for the light planning program
 DIALux for outdoor lighting, street lighting and
 indoor lighting, as well as luminaire data in
 EULUMDAT and IES format are available on the
 BEGA website at www.bega.com.

Accessories

Mounting box and mounting base for
 permanent mounting of floodlights on pillars,
 walls and ceilings

70 225 Mounting box IP 65

70 348 Mounting box IP 55

70 208 Mounting base h = 120 mm

Pole caps for mounting a floodlight on a pole

70 342 Pole cap for \varnothing 76 mm

70 343 Pole cap for \varnothing 89 mm

Pole caps for mounting 1-2 outrigger arms
 on top of a steel pole

70 387 Pole cap for pole \varnothing 76 mm

70 388 Pole cap for pole \varnothing 89 mm

Cross beams for floodlights for mounting on
 walls, under ceilings or on the floor

70 761 Cross beam for 3 floodlights

71 108 Shield

The shield can be screwed on and prevents
 lateral glare from one direction up to an angle
 of 45°.

71 107 Louvre

The internal louvre prevents looking from a
 lateral angle up to 45° into the luminaire from all
 directions.

For the accessories a separate instructions
 for use can be provided upon request.