

BEGA**84 534**

Surface floodlight RGBW · ZigBee

IP 65

Project · Reference number

Date

Product data sheet

Application


LED Surface floodlight with mounting box for additive colour mixing RGBW.
The floodlight can be controlled by ZigBee colour light control (Color Control).
We recommend our BEGA Control system for this purpose.

Product description

Luminaire made of aluminium alloy, aluminium and stainless steel
Safety glass with optical structure
Silicone gasket
Reflector made of pure anodised aluminium
Rotation range of floodlight 350°
Swivel range -35°/+70°
Mounting box with 2 fixing holes
ø 4.5 mm · 67 mm spacing
2 cable entries for through-wiring of mains supply cable ø 7-10,5 mm, max. 5 G 1.5²
Connecting terminal 2.5² with plug connection
Earth conductor connection with integral ZigBee radio module.
Power level: +8 dBm
Radio frequency 2.4 GHz
Can be used as a router or coordinator in ZigBee networks
Home Automation Profile 1.2.1
LED power supply unit
220-240 V ~ 0/50-60 Hz
Safety class I
Protection class IP 65
Dust-tight and protection against water jets
Impact strength IK07
Protection against mechanical impacts < 2 joule
CE – Conformity mark
Weight: 4.0 kg

Light technique

Broad spread light distribution.
Half beam angle 81/84°.
Luminaire data for the light planning program DIALux for outdoor lighting, street lighting and interior lighting as well as luminaire data in EULUMDAT and IES format are available on the BEGA website www.bega.com.

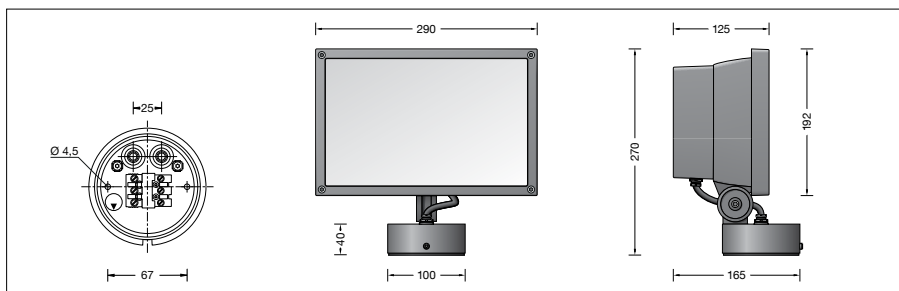

Lamp

Module connected wattage	39.5 W
Luminaire connected wattage	46 W
Rated temperature	$t_a = 25 \text{ }^\circ\text{C}$
Ambient temperature	$t_{a \text{ max}} = 40 \text{ }^\circ\text{C}$

Module designation	LED-0555/RGBW
Luminaire luminous flux	2824 lm
Luminaire luminous efficiency	61,4 lm/W

Lifetime of the LED

Ambient temperature $t_a = 15 \text{ }^\circ\text{C}$
– at 50,000 h: L80 B10
– at 130,000 h: L70 B50

Ambient temperature $t_a = 25 \text{ }^\circ\text{C}$
– at 50,000 h: L80 B10
– at 100,000 h: L70 B50

max. ambient temperature $t_a = 40 \text{ }^\circ\text{C}$
– at 50,000 h: L70 B10
– at 60,000 h: L70 B50

Article No. 84 534

Colour optionally graphite, white or silver
Graphite – Article number
White – Article number + **W**
Silver – Article number + **A**

Accessories

70 525 Shield
The attachable shield screens the light upwards or downwards.

A separate instructions for use can be provided upon request.