



BEGA**88 301**

In-ground luminaire



Project · Reference number

Date



Product data sheet

Application

Recessed LED location luminaire for recessed mounting in compacted surfaces, paths and open areas. Drive-over luminaire for vehicles with pneumatic tyres.

Please note:


Luminaire must not be used for installation in road lanes, where the fixture is exposed to a horizontal strain due to braking, acceleration and change of direction.

Product description

Recessed LED luminaire without power supply unit
Luminaire made of stainless steel
Steel grade no 1.4301
Recess housing made of aluminium profile, powder coated with 2 entries for connecting cable up to \varnothing 12 mm
Safety glass, white
Reflector made of pure anodised aluminium
Connecting cable 05RN8-F 2 x 1[□]
Cable length 3 m
Safety class III
Protection class IP 67
Dust-tight and protection against temporary immersion
Impact strength IK08
Protection against mechanical impacts < 5 joule
 – Safety mark
 – Conformity mark
Weight: 0.9 kg

Light technique

Luminaire data for the light planning program DIALux for outdoor lighting, street lighting and indoor lighting as well as luminaire data in EULUMDAT- and IES-format you will find on the BEGA web page www.bega.com.

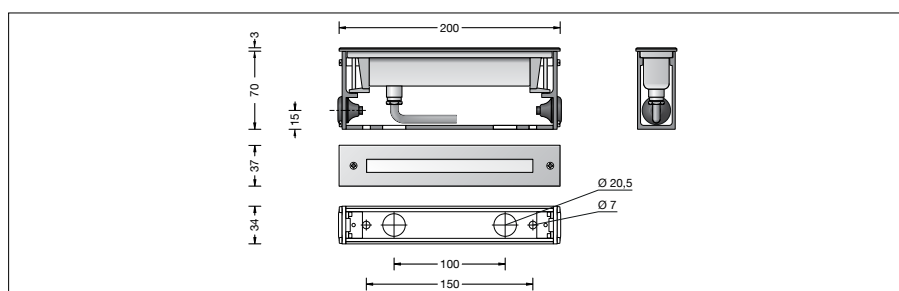

Lamp

Rated temperature
Ambient temperature
When installed in heat-insulating material
Voltage

$t_a = 25\text{ °C}$
 $t_{a\text{ max}} = 65\text{ °C}$
 $t_{a\text{ max}} = 65\text{ °C}$
24 V = DC

88 301 K4

Module connected wattage 0.2 W
Luminaire connected wattage 0.4 W
Colour temperature 4000 K
Colour rendering index CRI > 80
Module luminous flux 40 lm
Luminaire luminous flux 4 lm
Luminaire luminous efficiency 10 lm/W

88 301 K3

Module connected wattage
Luminaire connected wattage
Colour temperature 3000 K
Colour rendering index CRI > 80
Module luminous flux 40 lm
Luminaire luminous flux 4 lm
Luminaire luminous efficiency 10 lm/W

Service life · Ambient temperature

Ambient temperature $t_a = 25\text{ °C}$
LED psu: > 50,000h
LED module: > 200,000h (L80B50)
100,000h (L90B50)

Ambient temperature $t_a = 65\text{ °C}$
LED psu: 50,000h
LED module: > 200,000h (L80B50)
100,000h (L90B50)

Article No. 88 301

LED colour temperature optionally 4000K or 3000K
4000 K – Article number + **K4**
3000 K – Article number + **K3**

Accessories

Power supply unit for LED luminaires 24 V DC
Safety transformer according to DIN EN 61558/VDE 0570 part 2-6
70 564 Power supply unit for 0-15 W
70 465 Power supply unit for 0-25 W
70 565 Power supply unit for 0-35 W
70 566 Power supply unit for 0-50 W
70 567 Power supply unit for 0-75 W
70 169 Power supply unit for 0-150 W
230 V ~ 50-60 Hz

70 114 Power supply unit for 0-42 W
AC range: AC: 110-264 V ~ 50-60 Hz
DC range: DC: 170-280 V

The power supply units are also suitable for the operation of several LED luminaires. In this case, the maximum wattage of the power supply unit must not be exceeded.

Distribution box for installation in soil
70 730 Distribution box with 7 cable entries
Connection terminals 5 x 4[□]
71 053 Distribution box with 10 cable entries
Connection terminals 6 x 16[□]

For the accessories a separate instructions for use can be provided upon request.