

BEGA**88 730**

Surface-mounted luminaire



Project · Reference number

Date


Product data sheet

Application

Surface-mounted luminaire for light from an extremely low mounting height.
For the illumination of surfaces.
For orientating illumination in private and public areas.
For interior and exterior application.

Product description

Luminaire made of aluminium alloy, aluminium and stainless steel
Optical cylindrical lens made of crystal glass
Silicone gasket
Single side light exit 180°
Luminaire with mounting plate for bolting onto a foundation or an anchorage unit
Mounting plate with 3 fixing holes \varnothing 8.5 mm
Angle 120° · Pitch circle \varnothing 100 mm
2 inner screw cable glands complete with cone-thrust collar, gaskets and dummy plugs, suitable for through-wiring of mains supply cable of \varnothing 9 - 15 mm max. 3×2.5^2
Connecting terminal 4 \square
Earth conductor connection
Lampholder B 15d
Safety class I
Protection class IP 67
Dust-tight and protection against temporary immersion
Impact strength IK06
Protection against mechanical impacts < 1 joule
 – Safety mark
CE – Conformity mark
Weight: 2.6 kg

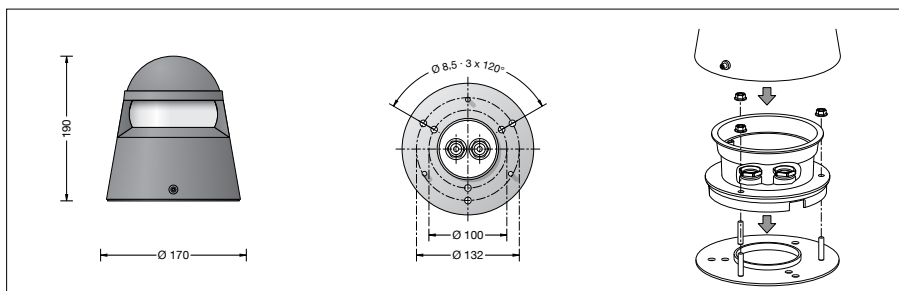

Lamp

Luminaire with lampholder B 15d
Lamp wattage max. 70 W

High voltage tungsten halogen lamp
QT 18 · 70 W · B 15d
Osram: Halolux Ceram Eco 1180 lm
Article-No.: 64494 ECO

Please note the lamp manufacturers' operating instructions.

Article No. 88 730

Colour graphite or silver
graphite – article number
silver – article number + **A**

Accessory

70 895 Anchorage unit
Anchorage unit with mounting flange made of galvanised steel. Total length 400 mm.
3 stainless steel fixing screws M 8.
Pitch circle \varnothing 100 mm.

70 269 Colour effect filter green

70 270 Colour effect filter blue

For the accessories a separate instructions for use can be provided upon request.

Light distribution

