


<b>GLASHÜTTE LIMBURG</b>	
<b>Product data sheet</b>	<b>Ceiling and wall luminaire</b>
	<b>IP 44</b>  <b>89 017</b>
Project · Reference number	Date

**Application**

Ceiling and wall luminaire made of hand-blown opal glass, satin matt and metal housing, for all lighting tasks in interior applications.

They are ideal for places where a soft and uniform lighting distribution is required. Luminaire with a high protection class.

**Product description**

Aluminium alloy housing,  
finish white enamel

Hand-blown opal glass, satin matt  
2 fixing holes  $\varnothing$  5.5 mm

110 mm spacing

2 cable entries for through-wiring for mains

cable up to  $\varnothing$  10.5 mm max.  $3 \times 1.5$

Lampholder terminals  $2.5$

Earth conductor terminal


Lampholder E 27


Safety class I

Protection class IP 44

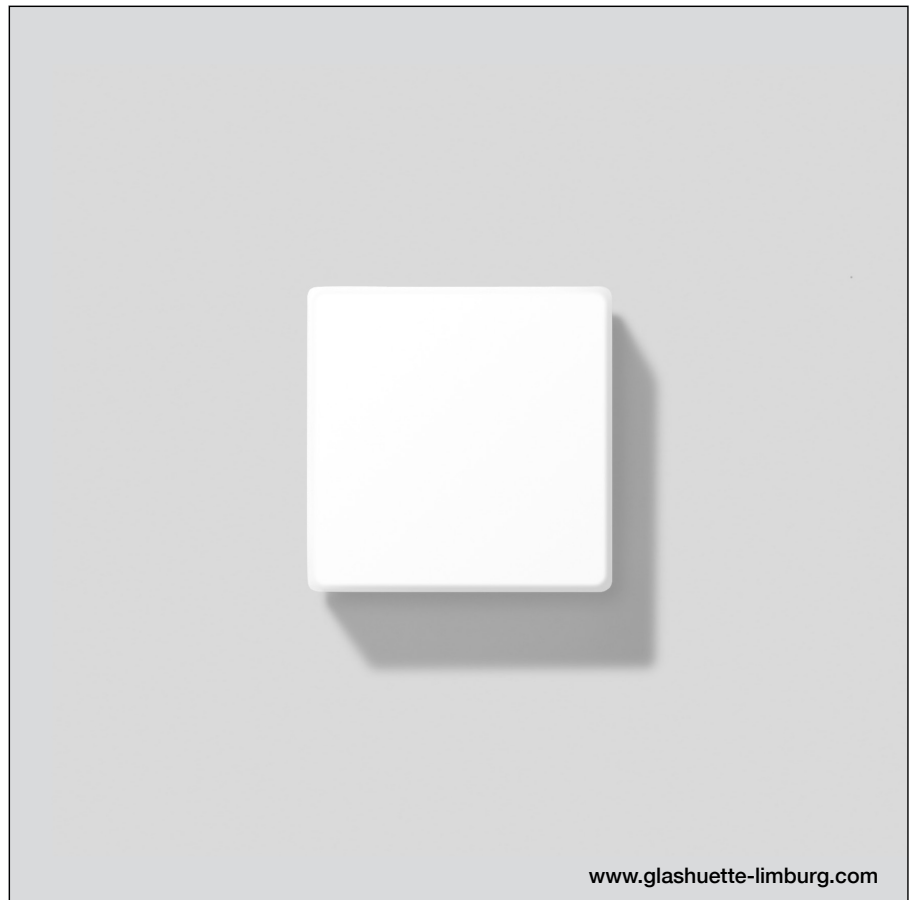
Protected against granular foreign bodies

> 1 mm and splash water

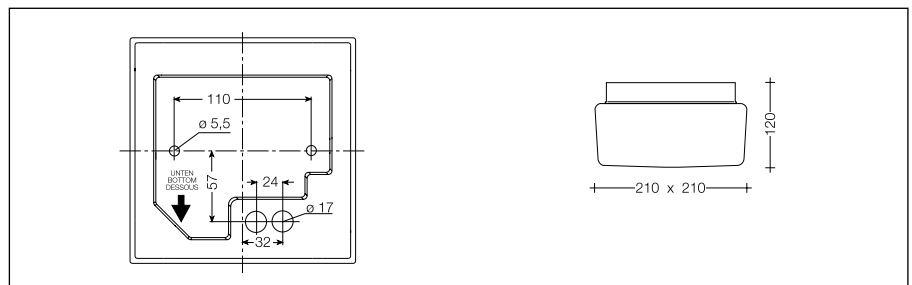
 – Safety mark

 – Conformity mark

Weight: 1.6 kg



[www.glashuette-limburg.com](http://www.glashuette-limburg.com)

**Lamp**

Luminaire with lampholder E 27

Lamp wattage max. 75 W

High voltage tungsten halogen lamp QA 55 ·  
E 27

Osram: Halogen Eco Classic A 57 W 915 lm

Philips: Eco Classic A 53 W 850 lm

Please note the lamp manufacturers' operating instructions.