


GLASHÜTTE LIMBURG	
Product data sheet	Ceiling and wall luminaire IP 44  89 018
Project · Reference number	Date

Application

Ceiling and wall luminaire made of hand-blown opal glass, satin matt and metal housing, for all lighting tasks in interior applications.

They are ideal for places where a soft and uniform lighting distribution is required. Luminaire with a high protection class.

Product description

Aluminium alloy housing,
finish white enamel

Hand-blown opal glass, satin matt

2 fixing holes \varnothing 5 mm

170 mm spacing

2 cable entries for through-wiring for mains

cable up to \varnothing 10,5 mm max. $3 \times 1,5$

Connecting terminal $2,5$

Earth conductor connection


Lampholder E 27


Safety class I

Protection class IP 44

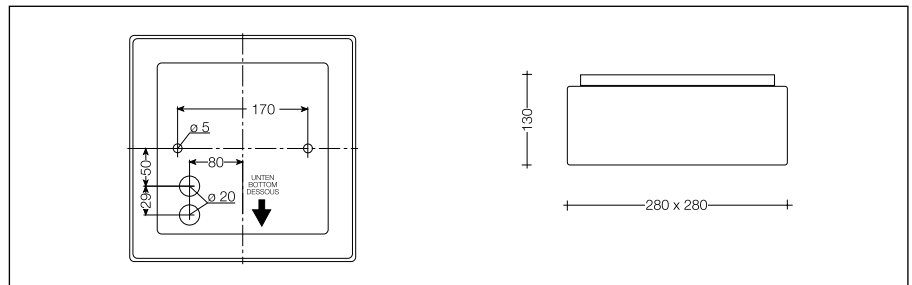
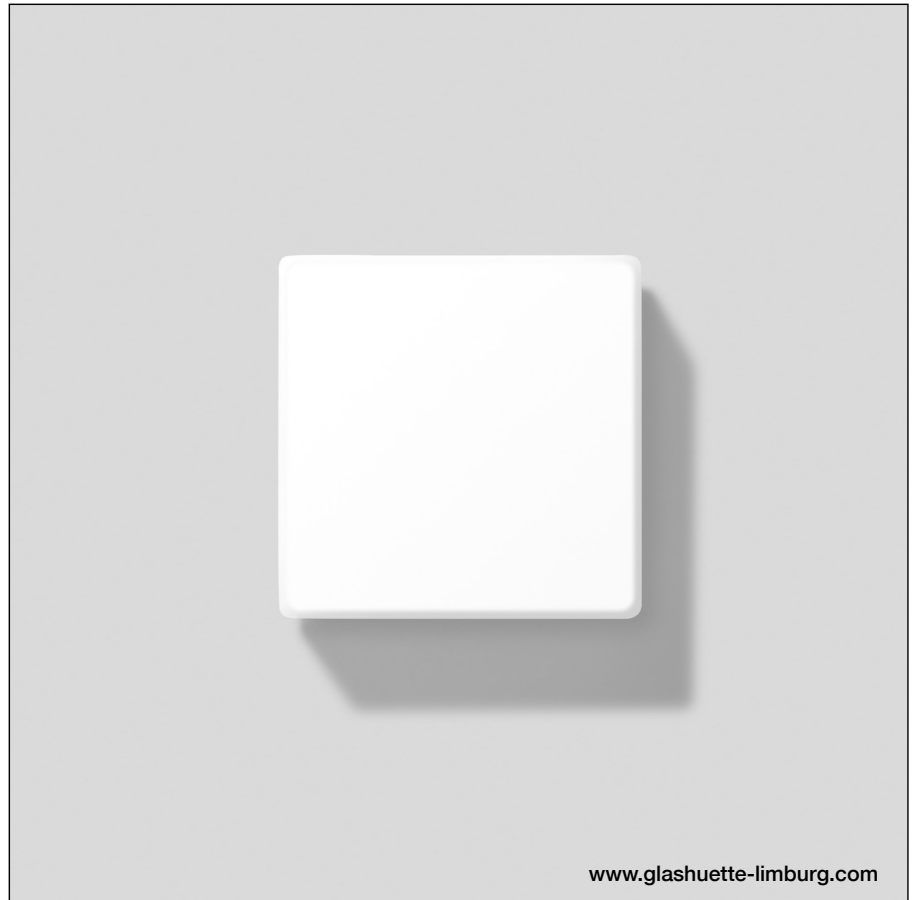
Protected against granular foreign bodies

> 1 mm and splash water

 – Safety mark

 – Conformity mark

Weight: 2,6 kg

**Lamp**

Luminaire with lampholder E 27

Lamp wattage max. 2 x 60 W

2 High voltage tungsten halogen lamps

QA 55 · E 27

Osram: Halogen Eco Classic A 46 W 700 lm

Philips: Eco Classic A 42 W 630 lm

Please note the lamp manufacturers' operating instructions.