


<b>GLASHÜTTE LIMBURG</b>	
<b>Product data sheet</b>	<b>Ceiling and wall luminaire</b>
	<b>IP 44</b>  <b>8019</b>
Project · Reference number	Date

**Application**

Ceiling and wall luminaire made of hand-blown opal glass, satin matt and metal housing, for all lighting tasks in interior applications.

They are ideal for places where a soft and uniform lighting distribution is required. Luminaire with a high protection class.

**Product description**

Aluminium alloy housing,  
finish white enamel

Hand-blown opal glass, satin matt  
2 fixing holes  $\varnothing$  5.2 mm

120 mm spacing

1 cable entry for mains supply cable

up to  $\varnothing$  10.5 mm max. 3 x 1.5<sup>□</sup>

Connecting terminal 2.5<sup>□</sup>

Earth conductor connection


Lampholder E 27


Safety class I

Protection class IP 44

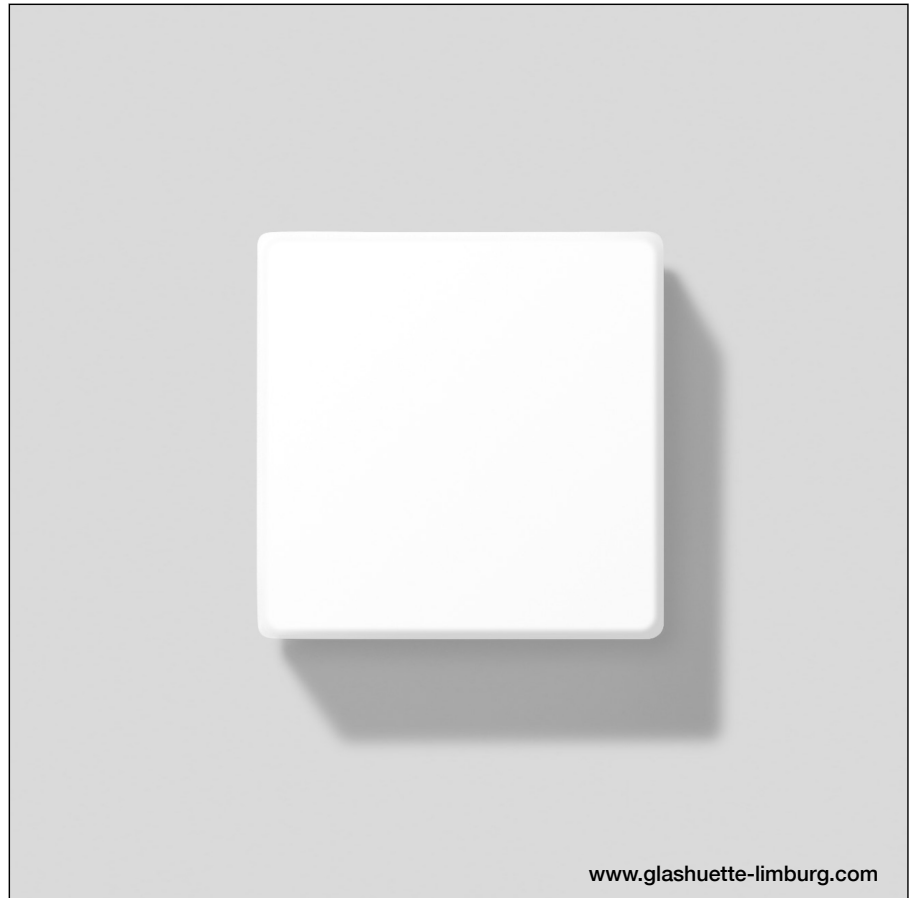
Protected against granular foreign bodies

> 1 mm and splash water

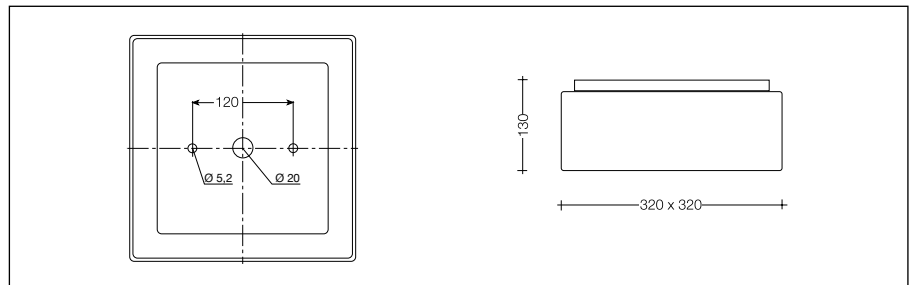
 – Safety mark

 – Conformity mark

Weight: 3.5 kg



[www.glashuette-limburg.com](http://www.glashuette-limburg.com)

**Lamp**

Luminaire with lampholder E 27

Lamp wattage max. 4 x 40 W

4 High voltage tungsten halogen lamps

QA 55 · E 27

Osram: Halogen Eco Classic A 30 W    405 lm

Philips: Eco Classic A 28 W            370 lm

Please note the lamp manufacturers' operating instructions.