

BEGA**89 514.1**

Ceiling luminaire for indoor use



Project · Reference number


Date


Product data sheet

Application

Open and free-radiating ceiling luminaire · indoor luminaire with hand-blown opal glass, satin matt for a soft and uniform light distribution.

Product description

Metal housing,
finish white enamel
Hand-blown opal glass, satin matt
2 fixing holes \varnothing 5.5 mm
85 mm spacing
2 cable entries for through-wiring for mains cable up to \varnothing 10.5 mm max. 3×1.5 [□]
Connecting terminal 2.5[□]
Earth conductor connection
Lampholder GX 24 q-3
Electronic ballast (EEI=A2)
220-240 V \sim 0/50-60 Hz
DC 176-264 V
DC Start \geq 198 V
Safety class I
 – Safety mark
CE – Conformity mark
Weight: 1.6 kg

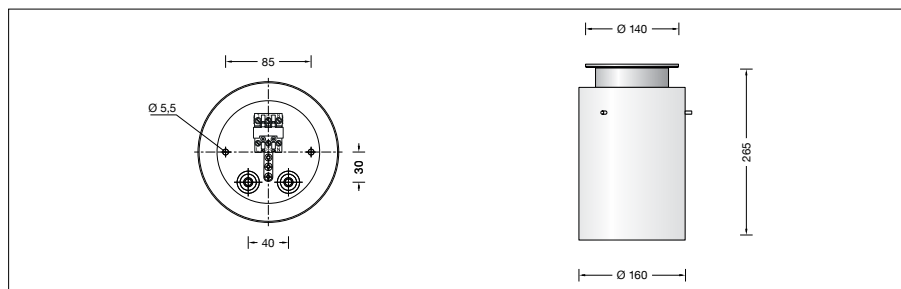

Lamp

Compact fluorescent lamp
TC-TELI 26 W · GX 24 q-3

| | |
|----------------------------------|---------|
| Osram: Dulux T/E Plus 26 W / ... | 1800 lm |
| Philips: PL-T TOP 26 W / 4p | 1800 lm |

Please note the lamp manufacturers' operating instructions.

Light technique

Luminaire data for the light planning program DIALux for outdoor lighting, street lighting and indoor lighting as well as luminaire data in EULUMDAT- and IES-format you will find on the BEGA web page www.bega.com.