


GLASHÜTTE LIMBURG

Product data sheet

Ceiling luminaire

**8578**



Project · Reference number

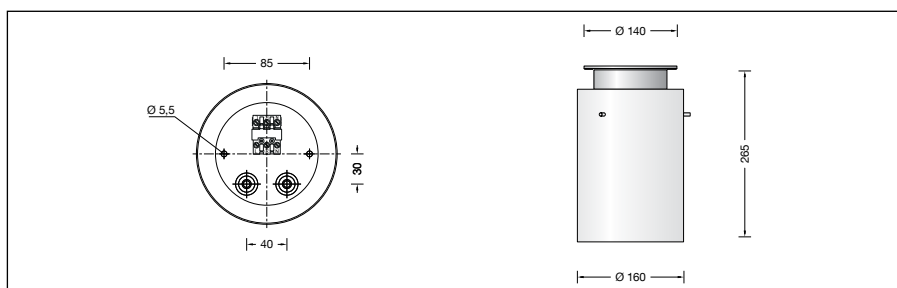
Date

Application

Open and free-radiating ceiling luminaire with hand-blown opal glass, satin matt for a soft and uniform light distribution.

Product description

Stainless steel housing
 Hand-blown opal glass, satin matt
 2 cable entries for through-wiring for mains cable up to \varnothing 10,5 mm max. 3 x 1,5[□]
 2 fixing holes \varnothing 5,5 mm,
 85 mm spacing
 Connecting terminals 2,5[□]
 Earth conductor connection
 Lampholder GX 24 q-3
 Electronic ballast (EEI=A2)
 220-240 V \sim 0/50-60 Hz
 DC 176-264 V
 DC Start \geq 198 V
 Safety class I
 – Safety mark
 – Conformity mark
 Weight: 1.5 kg


www.glashuette-limburg.com
**Lamp**

Compact fluorescent lamp
 TC-TELI 26 W · GX 24 q-3

Osram: Dulux T/E Plus 26 W / ... 1800 lm
 Philips: PL-T TOP 26 W / 4p 1800 lm

Please note the lamp manufacturers' operating instructions.