

BEGA**89 515.1**

Ceiling luminaire for indoor use



Project · Reference number

Date


Product data sheet

Application

Open and free-radiating ceiling luminaire · indoor luminaire with hand-blown opal glass, satin matt for a soft and uniform light distribution.

Product description

Metal housing,
finish white enamel
Hand-blown opal glass, satin matt
2 fixing holes \varnothing 5.5 mm
105 mm spacing
2 cable entries for through-wiring for mains cable up to \varnothing 10.5 mm max. $3 \times 1.5^{\square}$
Plug connection
Connecting terminal 2.5^{\square}
Earth conductor connection
Lampholder GX 24 q-3/4
Electronic ballast (EEL=A2)
220-240 V \sim 0/50-60 Hz
DC 186-276 V
DC Start \geq 198 V
Safety class I
 – Safety mark
 – Conformity mark
Weight: 2.8 kg

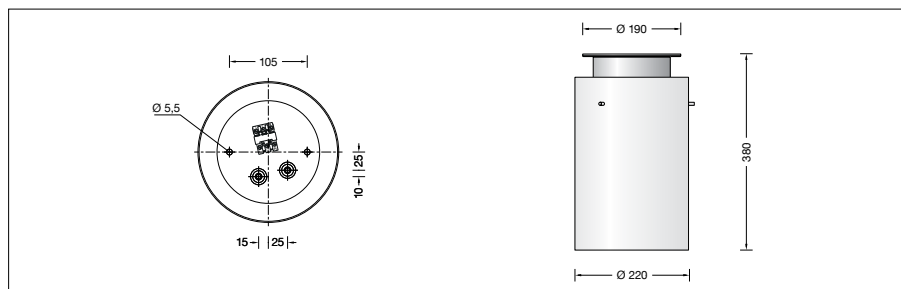

Lamp

Compact fluorescent lamp
TC-TELI 26 · 32 · 42 W · GX 24 q-3/4

Osram:

Dulux T/E Plus 26 W /...	1800 lm
Dulux T/E Plus 32 W /...	2400 lm
Dulux T/E Plus 42 W /...	3200 lm

Philips:

PL-T 26 W/4p	1800 lm
PL-T 32 W/4p	2400 lm
PL-T 42 W/4p	3200 lm

Please note the lamp manufacturers' operating instructions.

Article No. 89 515.1

Finish options

- Enamel, white
- Stainless steel

Code number **.1**
Code number **.2**