

GLASHÜTTE LIMBURG

Product data sheet

Ceiling luminaire

**8579**

Project · Reference number

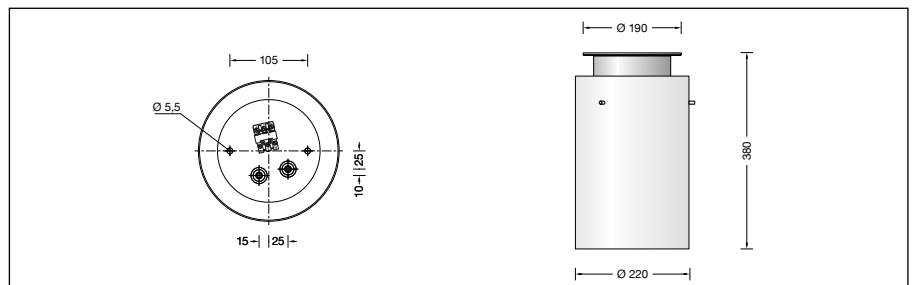
Date

Application

Open and free-radiating ceiling luminaire with hand-blown opal glass, satin matt for a soft and uniform light distribution.

Product description

Stainless steel housing
 Hand-blown opal glass, satin matt
 2 cable entries for through-wiring for mains cable up to \varnothing 10.5 mm max. 3 x 1.5[□]
 2 fixing holes \varnothing 5.5 mm,
 105 mm spacing
 Connecting terminals 2.5[□]
 Earth conductor connection
 Lampholder GX 24 q-3/4
 Electronic ballast (EEI=A2)
 220-240 V \sim 0/50-60 Hz
 DC 186-276 V
 DC Start \geq 198 V
 Safety class I
 – Safety mark
 – Conformity mark
 Weight: 2.8 kg


www.glashuette-limburg.com
**Lamp**

Compact fluorescent lamp
 TC-TELI 26 · 32 · 42 W · GX 24 q-3/4

Osram:

Dulux T/E Plus 26 W /...	1800 lm
Dulux T/E Plus 32 W /...	2400 lm
Dulux T/E Plus 42 W /...	3200 lm

Philips:

PL-T 26 W/4p	1800 lm
PL-T 32 W/4p	2400 lm
PL-T 42 W/4p	3200 lm

Please note the lamp manufacturers' operating instructions.