

GLASHÜTTE LIMBURG

Product data sheet

Wall luminaire

**89 663**



Project · Reference number

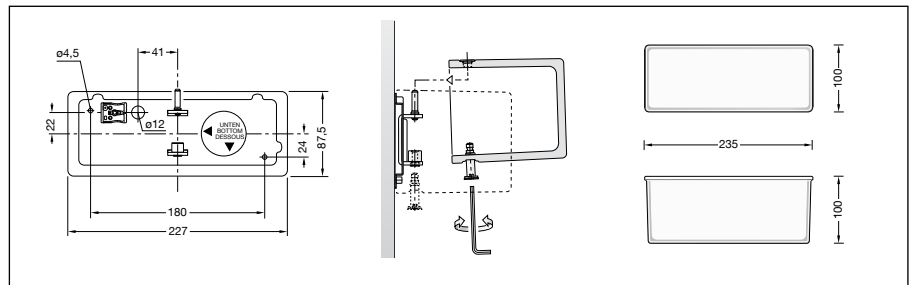
Date

Application

Enclosed and free-radiating wall luminaire with crystal glass and metal bracket. For all lighting tasks in interior applications. They are ideal for places where a soft and uniform lighting distribution is required.

Product description

Metal fitter, finish white enamel RAL 9010
 Crystal glass, inside white
 2 fixing holes \varnothing 5.5 mm
 180 x 46 mm spacing
 1 cable entry for mains supply cable up to \varnothing 10.5 mm max. $3 \times 1.5^{\square}$
 Connecting terminal 2.5^{\square}
 Earth conductor connection
 Lampholder GX 24 q-2
 Electronic ballast (EEI=A2 BAT)
 220-240 V \sim 0/50-60 Hz
 DC 176-264 V
 DC Start \geq 198 V
 Safety class I
 – Safety mark
 – Conformity mark
 Weight: 1.9 kg


www.glashuette-limburg.com
**Lamp**

Compact fluorescent lamp
 TC-TELI 18 W · GX 24 q-2

Osram: Dulux T/E Plus 18 W / ... 1200 lm
 Philips: PL-T TOP 18 W / 4p 1200 lm

Please note the lamp manufacturers' operating instructions.