

BEGA**89 664**

Wall luminaire for indoor use



Project · Reference number

Date

Product data sheet

Application

Enclosed and free-radiating wall luminaire · indoor luminaire with crystal glass and metal bracket.

For all lighting tasks in interior applications. They are ideal for places where a soft and uniform lighting distribution is required.

Product description

Metal housing, finish white enamel

Crystal glass, inside white

2 fixing holes \varnothing 4.5 mm

219 mm spacing

2 cable entries for through-wiring for mains

cable up to \varnothing 10.5 mm max. 3×1.5

Connecting terminal 2.5

Earth conductor connection

Lampholder GX 24 q-3

Electronic ballast (EEI=A2)

220-240 V \sim 0/50-60 Hz

DC 176-264 V


DC Start \geq 198 V

Safety class I

– Safety mark

CE – Conformity mark

Weight: 2.2 kg

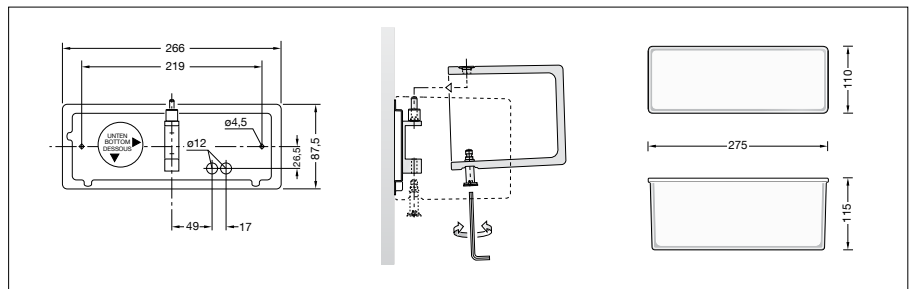

Lamp

Compact fluorescent lamp
TC-TELI 26 W · GX 24 q-3

Osram: Dulux T/E Plus 26 W / ... 1800 lm
Philips: PL-T TOP 26 W / 4p 1800 lm

Please note the lamp manufacturers' operating instructions.