

**GLASHÜTTE LIMBURG**

Product data sheet

Wall luminaire

**8679**

Project · Reference number

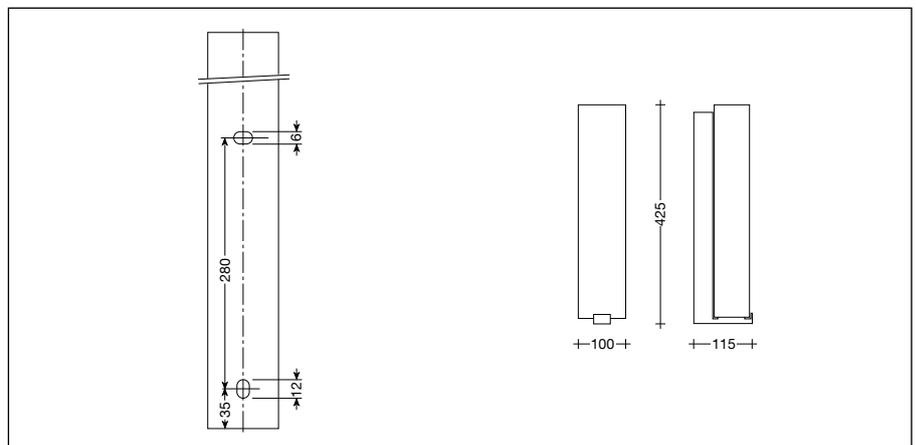
Date

**Application**

Wall luminaire with hand-blown, satin matt opal glass.  
The character of the three-ply opal glass creates a smooth and uniform light distribution in the room.

**Product description**

Aluminium fitter, matt surface finish  
Hand-blown opal glass, satin matt  
2 mounting holes  $\varnothing$  6 mm  
Elongated holes · 280 mm spacing  
Connecting terminals 2.5<sup>□</sup>  
Earth conductor connection  
Lampholder 2 G 11  
Electronic ballast  
230-240 V  $\sim$  0/50-60 Hz  
Safety class I  
 10  – Safety mark  
 – Conformity mark  
Weight: 2.0 kg


[www.glashuette-limburg.com](http://www.glashuette-limburg.com)
**Lamp**

Compact fluorescent lamp  
TC-L · 24 W · 2 G 11

Osram: Dulux L 24 W                      1800 lm  
Philips: PL-L 24 W                        1800 lm

Please note the lamp manufacturers' operating instructions.