

BEGA**89 732.2**

Wall luminaire for indoor use



Project · Reference number


Date

Product data sheet

Application


Shielded wall luminaire · indoor luminaire for many lighting tasks in interior applications. The light emits upwards and downwards. The light from the lamps is distributed softly and uniformly on the installation surface and in the room.

Product description

Luminaire made of die-cast aluminium
 Shield and fitter matt brushed
 Hand-blown opal glass
 1 fixing hole \varnothing 5 mm
 1 cable entry for mains supply cable up to \varnothing 10.5 mm max. 3 x 1.5[□]
 Connecting terminals 2.5[□]
 Earth conductor connection
 Lampholder E 27
 Safety class I
 Protection class IP 44
 Protected against granular foreign bodies > 1 mm and splash water
 – Safety mark
CE – Conformity mark
 Weight: 0.8 kg

Light technique

Luminaire data for the light planning program DIALux for outdoor lighting, street lighting and indoor lighting as well as luminaire data in EULUMDAT- and IES-format you will find on the BEGA web page www.bega.com.

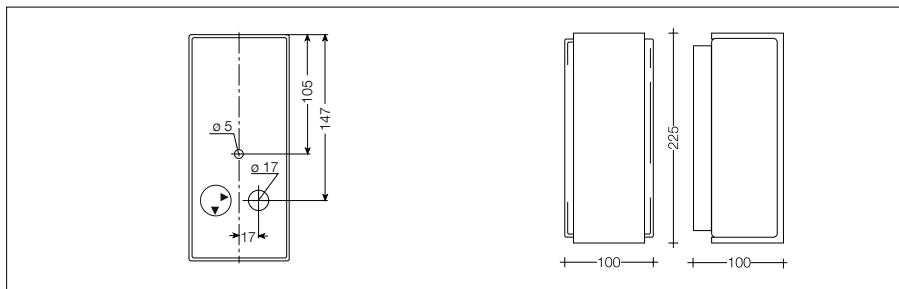

Lamps

Luminaire with lampholder E 27
 Lamp output max. 60 W

For this luminaire we recommend the following BEGA LED lamps:

13510 LED 7 W · 805 lm · 2700 K
13548 LED 7 W · 805 lm · 2700 K
 dimmable

Detailed technical and lighting data for the lamps can be found in the data sheets on our website.

Article No. 89 732.2

Finish options

- Aluminium, matt
- Polished stainless steel

Code number **.2**

Code number **.3**