

BEGA**89 733.3**

Wall luminaire for indoor use



Project · Reference number



Date

Product data sheet

Application



Shielded wall luminaire · indoor luminaire for many lighting tasks in interior applications. The light emits upwards and downwards. The light from the lamps is distributed softly and uniformly on the installation surface and in the room.

Product description

Luminaire made of die-cast aluminium
 Fitter matt brushed
 Polished stainless steel shield
 Hand-blown opal glass
 2 mounting holes \varnothing 4.8 mm
 Distance apart 255 mm
 1 cable entry for mains supply cable up to \varnothing 10.5 mm max. $3 \times 1.5^{\square}$
 Connection terminal 2.5^{\square}
 Earth conductor connection
 Lampholder E 27
 Safety class I
 Protection class IP 44
 Protected against granular foreign bodies > 1 mm and splash water
 – Safety mark
 – Conformity mark
 Weight: 1.4 kg

Light technique

Luminaire data for the light planning program DIALux for outdoor lighting, street lighting and indoor lighting as well as luminaire data in EULUMDAT- and IES-format you will find on the BEGA web page www.bega.com.

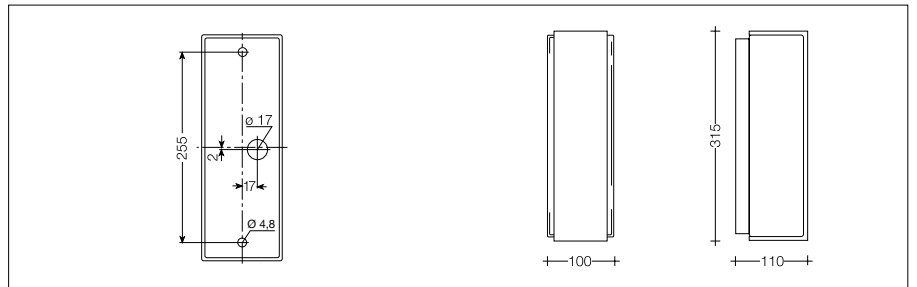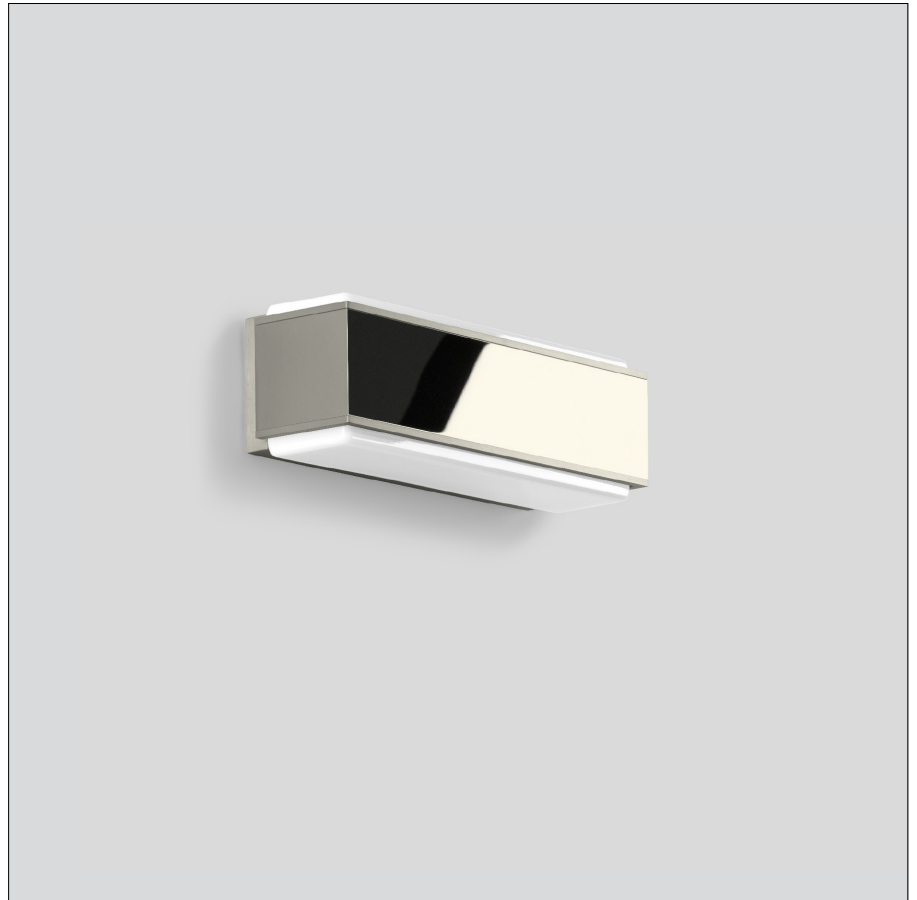

Lamp

Luminaire with lampholder E 27
 Lamp wattage max. 2×40 W

2 High voltage tungsten halogen lamps
 QA 55 · E 27

Osram: Halogen Eco Classic A 30 W 405 lm
 Philips: Eco Classic A 28 W 370 lm

Please note the lamp manufacturers' operating instructions.

Article No. 89 733.3

Shield finish options

- Aluminium, matt
- Polished stainless steel

Code number **.2**

Code number **.3**