

**GLASHÜTTE LIMBURG****Product data sheet****Wall luminaire****IP 44****89 734.3**

Project · Reference number

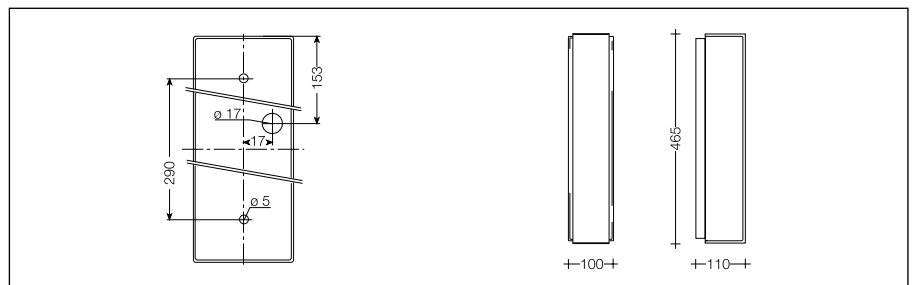
Date

**Application**

Shielded wall luminaire for many lighting tasks in interior applications.  
The light emits upwards and downwards.  
The light from the lamps is distributed softly and uniformly on the installation surface and in the room.

**Product description**

Luminaire made of die-cast aluminium  
Fitter matt brushed  
Polished stainless steel shield  
Hand-blown opal glass  
2 fixing holes  $\varnothing$  5 mm  
290 mm spacing  
1 cable entry for mains supply cable up to  $\varnothing$  10.5 mm max.  $3 \times 1.5^{\square}$   
Connecting terminal  $2.5^{\square}$   
Earth conductor connection  
Lampholder E 27  
Safety class I  
Protection class IP 44  
Protected against granular foreign bodies  $> 1$  mm and splash water  
**CE** – Conformity mark  
Weight: 2.2 kg


[www.glashuette-limburg.com](http://www.glashuette-limburg.com)
**Lamps**

Luminaire with lampholder E 27  
Lamp wattage max.  $3 \times 40$  W

3 High voltage tungsten halogen lamps · E 27  
Osram: Halogen Eco Classic A · 30 W 405 lm  
Philips: Eco Classic A-shape · 28 W 346 lm

Please note the lamp manufacturer's operating instructions.

**Article No. 89 734.3**

Finish options

- Aluminium, matt
- Polished stainless steel

Code number **.2**Code number **.3**