

Product data sheet

Wall luminaire

GLASHÜTTE LIMBURG

IP 44  **89 735.2**


Project · Reference number

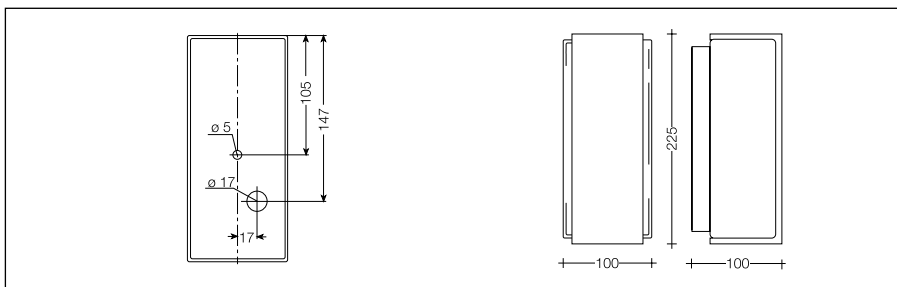
Date

Application

Shielded wall luminaire for many lighting tasks in interior applications.
The light emits upwards and downwards.
The light from the lamps is distributed softly and uniformly on the installation surface and in the room.

Product description

Luminaire made of die-cast aluminium
Shield and fitter matt brushed
Hand-blown opal glass
1 fixing hole \varnothing 5 mm
1 cable entry for mains supply cable up to \varnothing 10.5 mm max. $3 \times 1.5^{\square}$
Connecting terminal 2.5^{\square}
Earth conductor connection
Lampholder G 24 q-2
Electronic ballast
220-240 V \sim 0/50-60 Hz
Safety class I
Protection class IP 44
Protected against granular foreign bodies > 1 mm and splash water
 – Safety mark
CE – Conformity mark
Weight: 0.8 kg

**Lamp**

Compact fluorescent lamp
TC-DEL 18 W · G 24 q-2

Osram: Dulux D/E 18 W 1200 lm
Philips: PL-C 18 W/4p 1200 lm

Please note the lamp manufacturers' operating instructions.

Article No. 89 735.2

Finish options

- Aluminium, matt Code number **.2**
- Polished stainless steel Code number **.3**