

**GLASHÜTTE LIMBURG****Product data sheet****Wall luminaire**IP 44 **89 736.2**


Project · Reference number

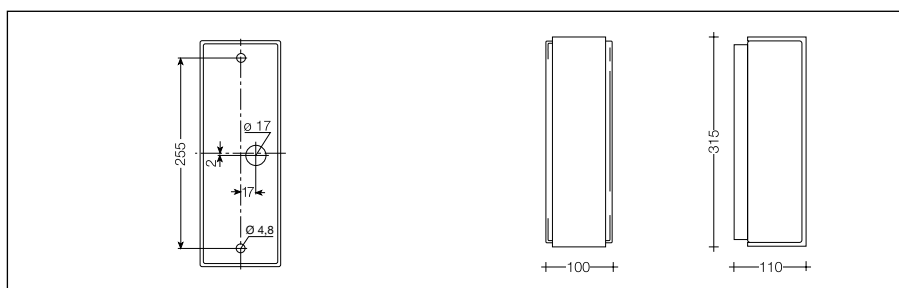
Date

**Application**

Shielded wall luminaire for many lighting tasks in interior applications.  
The light emits upwards and downwards.  
The light from the lamps is distributed softly and uniformly on the installation surface and in the room.

**Product description**

Luminaire made of die-cast aluminium  
Shield and fitter matt brushed  
Hand-blown opal glass  
2 fixing holes  $\varnothing$  4.8 mm  
255 mm spacing  
1 cable entry for mains supply cable up to  $\varnothing$  10.5 mm max. 3 x 1.5<sup>□</sup>  
Connecting terminal 2.5<sup>□</sup>  
Earth conductor connection  
Lampholder G 24 q-3  
Electronic ballast (EEL=A2)  
220-240 V  $\sim$  0/50-60 Hz  
DC 176-264 V  
DC Start  $\geq$  198 V  
Safety class I  
Protection class IP 44  
Protected against granular foreign bodies > 1 mm and splash water  
 – Safety mark  
**CE** – Conformity mark  
Weight: 1.4 kg

**Lamp**

Compact fluorescent lamp  
TC-DEL 26 W · G 24 q-3

Osram: Dulux D/E 26 W  
Philips: PL-C 26 W/4p

1800 lm  
1800 lm

Please note the lamp manufacturers' operating instructions.

**Article No. 89 736.2**

Finish options

- Aluminium, matt
- Polished stainless steel

Code number **.2**

Code number **.3**