

Product data sheet

Wall luminaire

GLASHÜTTE LIMBURG
 IP 44  **89 736.3**



Project · Reference number

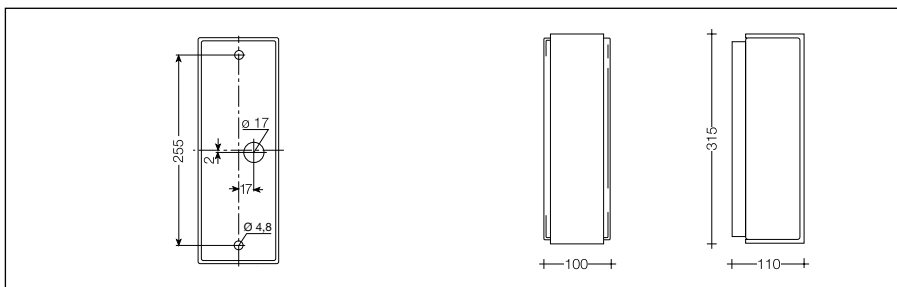
Date

Application

Shielded wall luminaire for many lighting tasks in interior applications.
 The light emits upwards and downwards.
 The light from the lamps is distributed softly and uniformly on the installation surface and in the room.

Product description

Luminaire made of die-cast aluminium
 Fitter matt brushed
 Polished stainless steel shield
 Hand-blown opal glass
 2 fixing holes \varnothing 4.8 mm
 255 mm spacing
 1 cable entry for mains supply cable up to \varnothing 10.5 mm max. 3×1.5^2
 Connecting terminal 2.5^2
 Earth conductor connection
 Lampholder G 24 q-3
 Electronic ballast (EEL=A2)
 220-240 V \sim 0/50-60 Hz
 DC 176-264 V
 DC Start \geq 198 V
 Safety class I
 Protection class IP 44
 Protected against granular foreign bodies $>$ 1 mm and splash water
 – Safety mark
 – Conformity mark
 Weight: 1.4 kg

**Lamp**

Compact fluorescent lamp
 TC-DEL 26 W · G 24 q-3

Osram: Dulux D/E 26 W 1800 lm
 Philips: PL-C 26 W/4p 1800 lm

Please note the lamp manufacturers' operating instructions.

Article No. 89 736.3

Finish options

- Aluminium, matt Code number **.2**
- Polished stainless steel Code number **.3**