





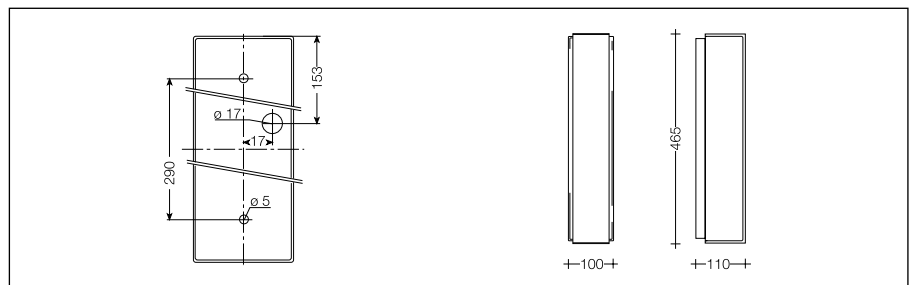
Product data sheet	Wall luminaire	IP 44  	GLASHÜTTE LIMBURG 89 737.3
Project · Reference number		Date	

Application

Shielded wall luminaire for many lighting tasks in interior applications.
The light emits upwards and downwards.
The light from the lamps is distributed softly and uniformly on the installation surface and in the room.

Product description

Luminaire made of die-cast aluminium
Fitter matt brushed
Polished stainless steel shield
Hand-blown opal glass
2 mounting holes \varnothing 5 mm
Elongated holes · 290 mm spacing
1 cable entry for mains supply cable up to \varnothing 10.5 mm max. 3 x 1.5[□]
Connecting terminal 2.5[□]
Earth conductor connection
Lampholder G 24 q-3
Electronic ballast
220-240 V \sim 0/50-60 Hz
Safety class I
Protection class IP 44
Protected against granular foreign bodies > 1 mm and splash water
  – Safety mark
CE – Conformity mark
Weight: 2.2 kg

**Lamps**

2 Compact fluorescent lamps
TC-DEL 26 W · G 24 q-3

Osram: Dulux D/E 26 W 1800 lm
Philips: PL-C 26 W/4P 1800 lm

Please note the lamp manufacturers' operating instructions.

Article No. 89 737.3

Finish options

- Aluminium, matt Code number **.2**
- Polished stainless steel Code number **.3**