



Product data sheet	Ceiling and wall luminaire	IP 44 	GLASHÜTTE LIMBURG 89 759.2
Project · Reference number		Date	

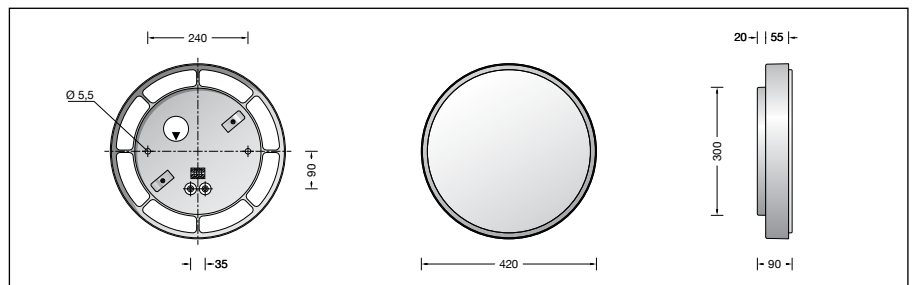
Application

Ceiling and wall luminaire made of hand-blown opal glass, satin matt and metal housing, for all lighting tasks in interior applications.

They are ideal for places where a soft and uniform lighting distribution is required. Luminaire with a high protection class.

Product description

Metal housing, finish
white aluminium enamel RAL 9006
Hand-blown opal glass, satin matt,
with sliding-bolt closure
2 fixing holes \varnothing 5.5 mm
240 mm spacing
2 cable entries for through-wiring for mains
cable up to \varnothing 10.5 mm max. $3 \times 1.5^{\square}$
Connecting terminal 2.5^{\square}
Earth conductor connection
Lampholder E 27
Safety class I
Protection class IP 44
Protected against granular foreign bodies
> 1 mm and splash water
 – Safety mark
CE – Conformity mark
Weight: 4.0 kg

**Lamp**

Luminaire with lampholder E 27
Lamp wattage max. 2 x 75 W

2 High voltage tungsten halogen lamps
QA 55 · E 27

Osram: Halogen Eco Classic A 57 W 915 lm
Philips: Eco Classic A 53 W 850 lm

Please note the lamp manufacturers' operating instructions.

Article No. 89 759.2

Finish options

- Enamel, white
- Enamel, white aluminium

Code number **.1**

Code number **.2**