



|                            |                                   |  |   |
|----------------------------|-----------------------------------|--|---|
| <b>Product data sheet</b>  | <b>Ceiling and wall luminaire</b> | <b>IP 44</b>  | <b>GLASHÜTTE LIMBURG</b><br><b>89 760.1</b> |
| Project · Reference number |                                   | Date   |   |

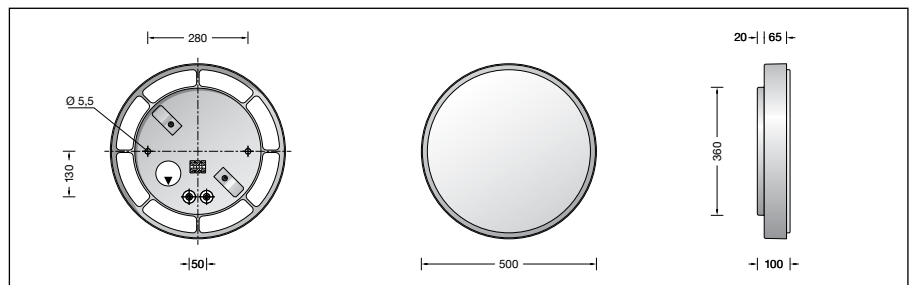
**Application**

Ceiling and wall luminaire made of hand-blown opal glass, satin matt and metal housing, for all lighting tasks in interior applications.

They are ideal for places where a soft and uniform lighting distribution is required.  
Luminaire with a high protection class.

**Product description**

Metal housing,  
finish white enamel  
Hand-blown opal glass, satin matt,  
with sliding-bolt closure  
2 fixing holes  $\varnothing$  5.5 mm  
280 mm spacing  
2 cable entries for through-wiring for mains  
cable up to  $\varnothing$  10.5 mm max.  $3 \times 1.5$ <sup>□</sup>  
Connecting terminal 2.5<sup>□</sup>  
Earth conductor connection  
Lampholder E 27  
Safety class I  
Protection class IP 44  
Protected against granular foreign bodies  
> 1 mm and splash water  
 – Safety mark  
**CE** – Conformity mark  
Weight: 4.4 kg

**Lamp**

Luminaire with lampholder E 27  
Lamp wattage max.  $3 \times 60$  W

3 High voltage tungsten halogen lamps  
QA 55 · E 27

Osram: Halogen Eco Classic A 46 W    700 lm  
Philips: Eco Classic A 42 W        630 lm

Please note the lamp manufacturers' operating instructions.

**Article No. 89 760.1**

Finish options

- Enamel, white
- Enamel, white aluminium

Code number **.1**

Code number **.2**