

GLASHÜTTE LIMBURG

Product data sheet

Ceiling and wall luminaire

IP 44 **8763**

Project · Reference number

Date

Application

Ceiling and wall luminaire made of hand-blown opal glass, satin matt and metal housing, for all lighting tasks in interior applications.

They are ideal for places where a soft and uniform lighting distribution is required. Luminaire with a high protection class.

Product description

Metal housing, finish

white aluminium enamel RAL 9006

Hand-blown opal glass, satin matt, with sliding-bolt closure

2 fixing holes \varnothing 5.5 mm

280 mm spacing

2 cable entries for through-wiring for mains

cable up to \varnothing 10.5 mm max. 3×1.5 \square

Connecting terminal 2.5 \square

Earth conductor connection


Lampholder E 27


Safety class I

Protection class IP 44

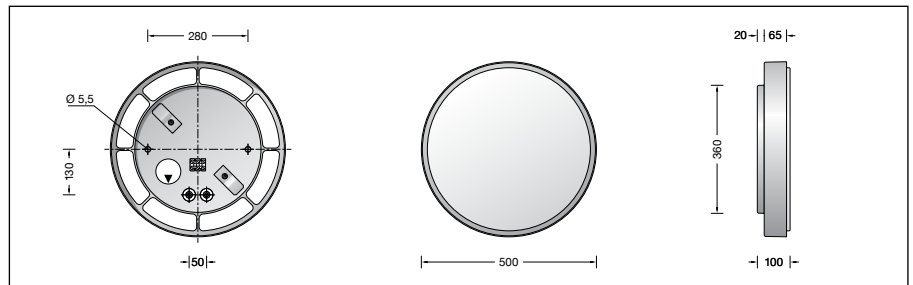
Protected against granular foreign bodies

> 1 mm and splash water

 – Safety mark

 – Conformity mark

Weight: 5.7 kg

**Lamp**

Luminaire with lampholder E 27

Lamp wattage max. 3×60 W

3 High voltage tungsten halogen lamps

QA 55 · E 27

Osram: Halogen Eco Classic A 46 W 700 lm

Philips: Eco Classic A 42 W 630 lm

Please note the lamp manufacturers' operating instructions.