


BEGA**89878.3**

Wall luminaire for indoor use



Project · Reference number

Date

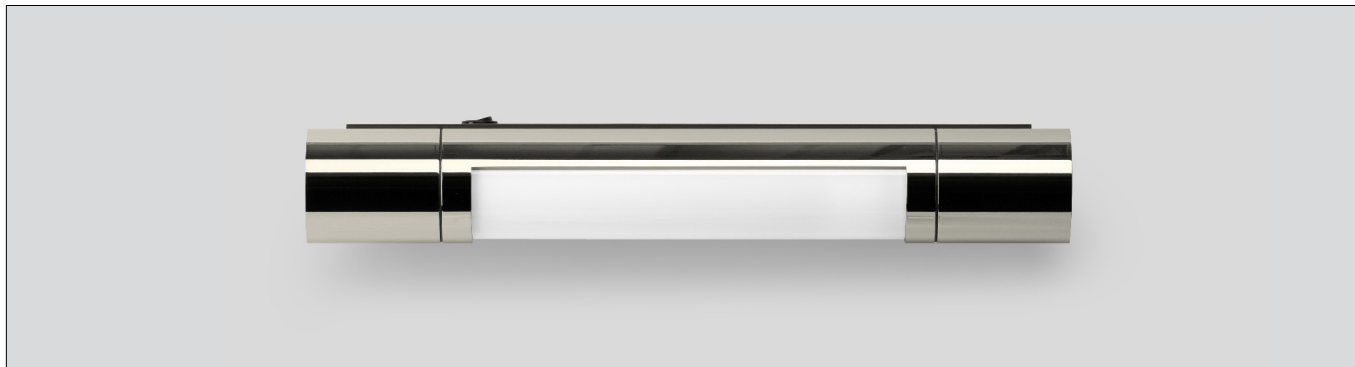

Product data sheet

Application

Wall luminaire · indoor luminaire made of hand-blown opal glass, with metal housing.

The light aperture can be adjusted infinitely by rotating the the shield around its longitudinal axis.

Light aperture 170°; adjustable 360°.

Product description

Die-cast aluminium and aluminium housing, finish chrome

Hand-blown opal glass

2 fixing holes \varnothing 5 mm

120 mm spacing

Connecting terminal 2.5[□]

Earth conductor connection

Replacement of lamp without tools.

Lampholder G 24 q-2

Electronic ballast (EEL=A2 BAT)

220-240 V \sim 0/50-60 Hz

DC 176-264 V


DC Start \geq 198 V

Safety class I

– Safety mark

CE – Conformity mark

Weight: 1.0 kg

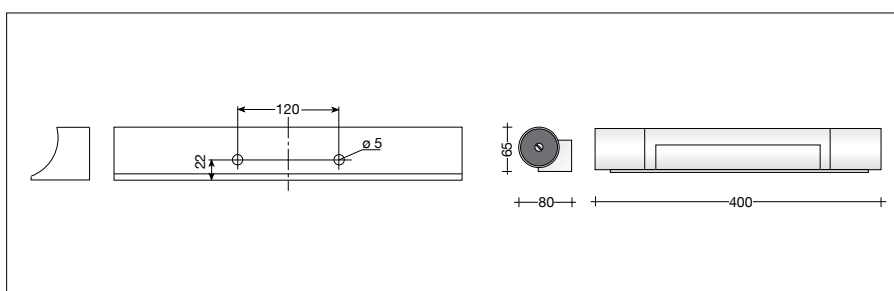

Lamp

Compact fluorescent lamp
TC-DEL 18 W · G 24 q-2

Osram: Dulux D/E 18 W

1200 lm

Philips: PL-C 18 W/4p

1200 lm

Please note the lamp manufacturers' operating instructions.

Article No. 89878.3

Finish options

- Enamel, white
- Stainless steel
- Chrome

Code number **.1**

Code number **.2**

Code number **.3**