

BEGA**99 282**

Pole top luminaire



Project · Reference number

Date

Product data sheet

Application

Pole top luminaire with unshielded light distribution.

Soft diffused light through white impact resistant synthetic diffuser.

For lighting paths, parks and pedestrian precincts in private or public sectors.

For mounting heights 1700 mm.

Product description

Luminaire made of cast aluminium, aluminium and stainless steel

White synthetic sphere

For pole top \varnothing 48 mm

Slip fitter insert depth 30 mm

Connecting terminal and

earth conductor terminal 2.5²

Strain-relief clamp

Lampholder E 27

Safety class I

Protection class IP 44

Protected against granular foreign bodies

> 1 mm and splash water

– Safety mark

– Conformity mark

Horizontal wind catching area: 0.07 m²

Weight: 1.1 kg

Lamp

Luminaire with lampholder E 27

Lamp output max. 75 W

For this luminaire we recommend the following BEGA LED lamps:

13509 LED 7 W · 805 lm · 2700 K

13547 LED 7 W · 805 lm · 2700 K
dimnable

13583 LED 7 W · 805 lm · 3000 K

13585 LED 7 W · 805 lm · 3000 K
dimnable

13511 LED 8 W · 1055 lm · 2700 K

13562 LED 12 W · 1520 lm · 2700 K


13563 LED 12 W · 1520 lm · 2700 K
dimnable

13587 LED 8 W · 1055 lm · 3000 K

13589 LED 12 W · 1520 lm · 3000 K

13591 LED 12 W · 1520 lm · 3000 K
dimnable

Detailed technical and lighting data for the lamps can be found in the data sheets on our website.

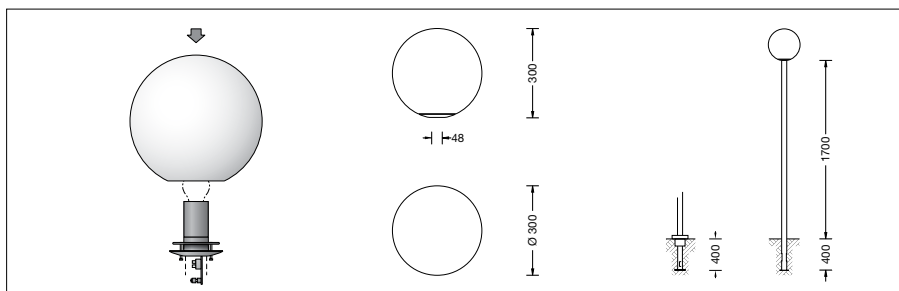

Accessory

For this luminaire we recommend to use the following BEGA luminaire poles:

Cylindrical pole made of aluminium w/o door

70 938 Pole with anch.section H 1700 mm

70 992 Pole with anch.section H 1700 mm

Light distribution

