
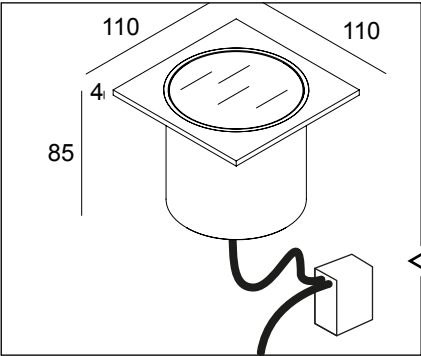




LOGIC S

DEEL
PARTIE
TEIL
PART
PARTE

A

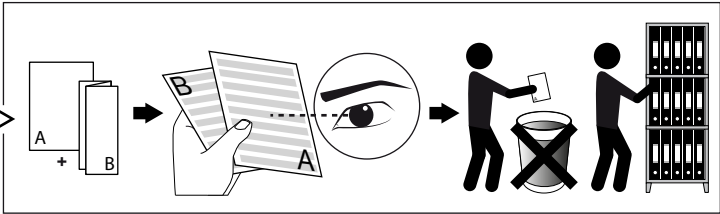

120 x 120 x 125

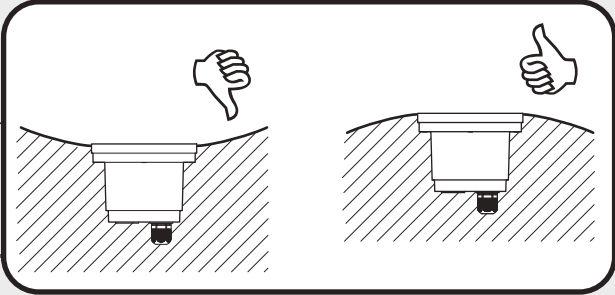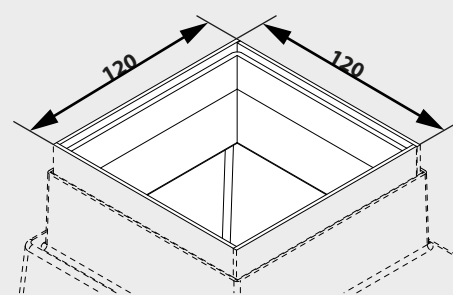

OPTIONS

GENIE BOX 90 R
CBOX

213 19 09
216 12 00

I _o	350mA
P _o	7,1W
U _o	100-240V



Stofdicht - Beschermtd tegen effecten van tijdelijke indompeling
Etanche aux poussières - Protégé contre les effets de l'immersion temporaire
Staubdicht - Geschützt gegen vorübergehend Eintaucheffekte
Dust-tight - Protected against the effects of temporary immersion
Hermético al polvo - Protegido contra los efectos de la inmersión temporal
A tenuta di polvere - Protetto contro gli effetti dell'immersione temporaneo

Enkel geschikt voor toestellen op zeer lage spanning (minder dan 50 V-AC / 120 V-DC)
Convient uniquement pour les produits à très basse tension (moins de 50 V-AC / 120 V-DC)
Geeignet für Güter mit sehr niedriger Spannung (unter 50 V-AC / 120 V-DC)
Only suited for goods at very low voltage (below 50 V-AC / 120 V-DC)
Se recomienda únicamente para aquellos productos de tensión muy baja (menos de 50 V-AC / 120 V-DC)
Vale unicamente per i prodotti a tensione molto bassa (inferiore a 50 V-AC / 120 V-DC)

