

LOGIC MINI W



Correcte verwijdering van dit product (Elektrische & elektronische afvalapparatuur)
Comment éliminer ce produit (Déchets d'équipements électriques et électroniques)
Korrekte Entsorgung dieses Produkts (Elektronmüll)
Correct disposal of this product (Waste electrical & electronical equipment)
Eliminación correcta de este producto (Material eléctrico y electrónico de descarte)
Corretto smaltimento del prodotto (Rifiuti elettrici ed elettronici)



Geschikt voor binnen- en buitengebruik, rekening houdend met opgegeven IP-waarden
Convient à usage intérieur et extérieur, prenant en compte l'IP indiquée
Eignet sich für innen- und aussenbereich, unter Berücksichtigung des angegebenen IP
Suitable for indoor and outdoor use, taking the indicated IP rating into consideration
Apto para uso interior y exterior en conformidad con el nivel IP indicado
Per utilizzo sia in interni che da esterni, da installare tenendo conto del suo grado di protezione (IP)



Enkel geschikt voor toestellen op zeer lage spanning (minder dan 50V AC)
Convient uniquement pour les produits à très basse tension (moins de 50V AC)
Geeignet für Güter mit sehr niedriger Spannung (unter 50V AC)
Only suited for goods at very low voltage (below 50V AC)
Se recomienda únicamente para aquellos productos de tensión muy baja (menos de 50V AC)
Vale unicamente per i prodotti a tensione molto bassa (inferiore a 50V AC)




Bevestiging wand inbouw
Montage mur encastré
Montage wand eingebaut
Fixation wall recessed
Montaje pared empotrado
Montaggio parete incasso

IP54


Beschermd tegen stof - Spatwatervast
Protégé contre les poussières - Protégé contre les projections d'eau
Staubgeschützt - Geschützt gegen Spritzwasser
Dust-protected - Protected against splashing water
Protegido contra el polvo - Protegido contra salpicaduras de agua
Protetto contro la polvere - Protetto contro gli schizzi d'acqua

Logic Mini W

Manual/



Ø 55 x 50
LOGIC MINI W R ♦
304 30 12 ♦
♦ = A / W
INCL 1 x POWERLED WHITE 0,5W / 3000K
EXCLLED POWER SUPPLY 24V-DC
♦ IP54
OPTIONS
CONCRETE BOX 188
LED POWER SUPPLY 24V-DC




Ø 55 x 50
LOGIC MINI W S ♦
304 31 12 ♦
♦ = A / W
INCL 1 x POWERLED WHITE 0,5W / 3000K
EXCLLED POWER SUPPLY 24V-DC
♦ IP54
OPTIONS
CONCRETE BOX 188
LED POWER SUPPLY 24V-DC



HOLE PATTERN

Ø55 x 50


min. 12




Options

INSTALLATION		
CONCRETE BOX 188	Ø60 x 65	Ø67 x 70
270 11 188		
CONTROL GEAR		
LED POWER SUPPLY	146 x 55 x 19	
24V-DC / 20W		
300 89 24 20		

Accessory Set

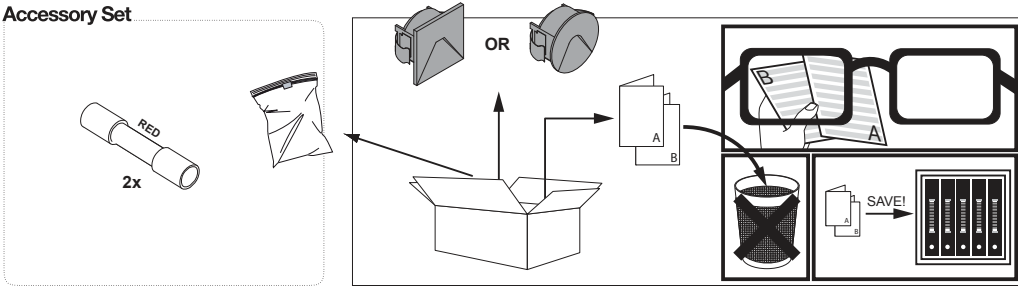


01

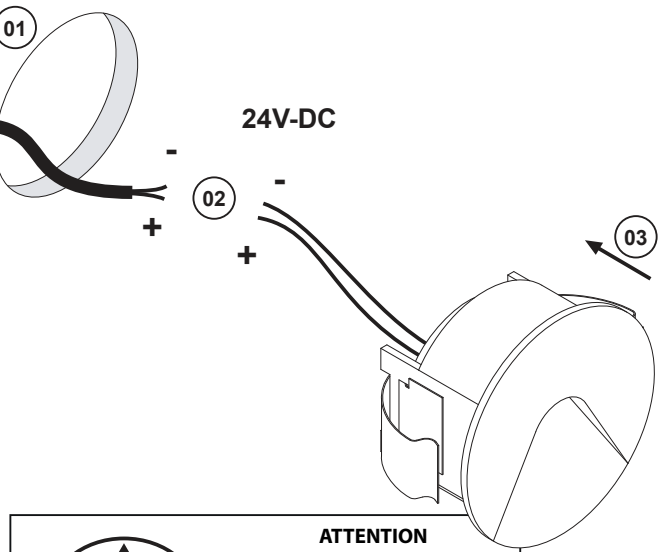

ATTENTION

OBSERVE PRECAUTIONS FOR HANDLING ELECTROSTATIC DISCHARGE SENSITIVE DEVICES

NO SECONDARY SWITCHING

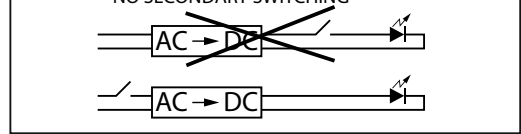


WATERPROOF CONNECT

02


24V-DC

A



DEVICE


B



DEVICE

RED or WHITE : +
BLACK : -

24V DC



230/240V AC

LED POWER SUPPLY
DELIVERED SEPARATELY
Ref.: 300 89 24 20

MAX. 40 LED MODULES / POWER SUPPLY

CONNECTION

OK

CONNECTION




NOK

CONNECTION



WARNING:
PLACE SWITCH ON
PRIMARY SIDE

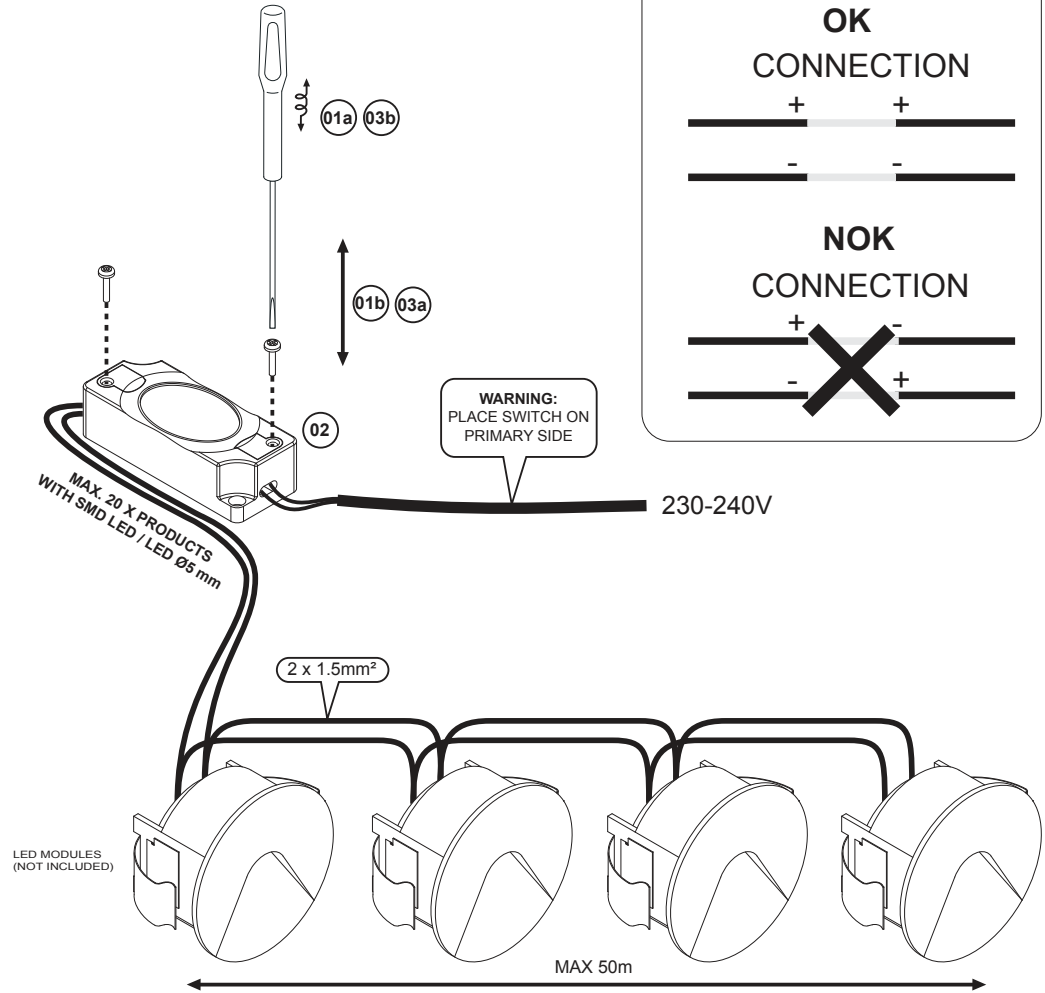

! WARNING

ANY CLAIM TO A WARRANTY SHALL BECOME NULL AND VOID IF THE DEVICE IS NOT INSTALLED WITH THE SUITABLE BOX (OPTIONAL) PROVIDED BY DELTALIGHT N.V.